



Gebrüder Heyl
Analysentechnik
GmbH & Co. KG

PRODUCT CATALOG 2020



Analysis Instruments, Controllers, Indicators, Analysis Kits and Test Kits

■ Applications	3
Online Analysis Instruments	
■ Testomat® Family.	13
• Testomat® 808	13
• Testomat® Modul	14
• Testomat® EVO	15
• Testomat 2000®	16
• Testomat® ECO	26
■ Titromat® Family.	24
■ Selection Help	27
■ Accessories	28
■ Spare Parts	35
■ Dosing pumps	39
■ Indicators/Reagents	40
• Our fundraising campaign with the Neven Subotic Foundation	40
Controllers	
■ Softmaster® Family.	43
■ MultiControl	46
■ Accessories/probes	48
■ Pilot Distributors	53
Analysis Systems	
■ Analysis Kits	54
■ Limit Value Test Kits	55
■ Quick Titration Test Kits	56
■ Colorimetric Test Kits	62
■ Analysis Kits	67
■ Bioresin®	68
■ Chemical Accessories	68
Services	
■ Replacement Instruments	69
■ Contract Development	70
■ Contract Manufacturing	71
■ General Terms and Conditions	72
■ Heyl Network	73

To make it easy for you to find our products quickly, we've marked off our product sectors with different colors. This shows you at a glance what product area you're in.

Selection help

Since our selection of Testomat devices has gotten quite large, we offer you our selection help table on page 27 as a special overview which will tell you what device is especially appropriate for what application

Gebrüder Heyl process photometers and titration instruments have been putting their reliability and practicality to the test since 1958.

With improved accuracy and resolution, in combination with analysis functions that have undergone consistent further development, the current generation of instruments helps water treatment system operators reduce costs and guarantee optimal water quality.

Improve your water treatment process with online analysis instruments

Plant operators and plant technicians can increase the efficiency of the water softening process with constant water quality monitoring.

This enables operators to recognize whether the regeneration process is running correctly, the resin quality is still sufficient, and sufficient regeneration conditioning agents are present in the right consistency.

The combination of **Testomat 2000®**, **Softmaster® MMP2** and **MultiControl CT** leads to less waste water, low conditioning agents use, and cost savings thanks to low energy requirements.

Which companies can benefit from online analytical devices?

Every company that has to monitor its process water cycle. We offer analytical devices for 14 different parameters including water and carbonate hardness, phosphate, sulphite, chromium VI, chlorine and chlorine dioxide.

Each of these parameters can be monitored continuously with one device. The data is then stored to provide documented evidence of the monitoring.

- bakeries
- meat processing plants
- steam generation sterilization
- laundry companies
- food and beverage industry (breweries, dairies)

- pulp and paper industry
- chemical industry
- pharmaceutical industry
- construction materials industry

For plant operators who want to comply with increasingly stringent process and effluent limit values, continuous online monitoring of their water treatment process is the safest solution.


Technical information:

Energy cost reduction through on-line water quality monitoring

This technical information concerns the effect of calcium and other deposits in steam boiler plants and cooling towers. Problems are that arise from deposits and possible solutions are highlighted.

The complete technical information can be found under Applications on our homepage, www.heyhl.de.

Online monitoring of water quality with Gebrüder Heyl instruments

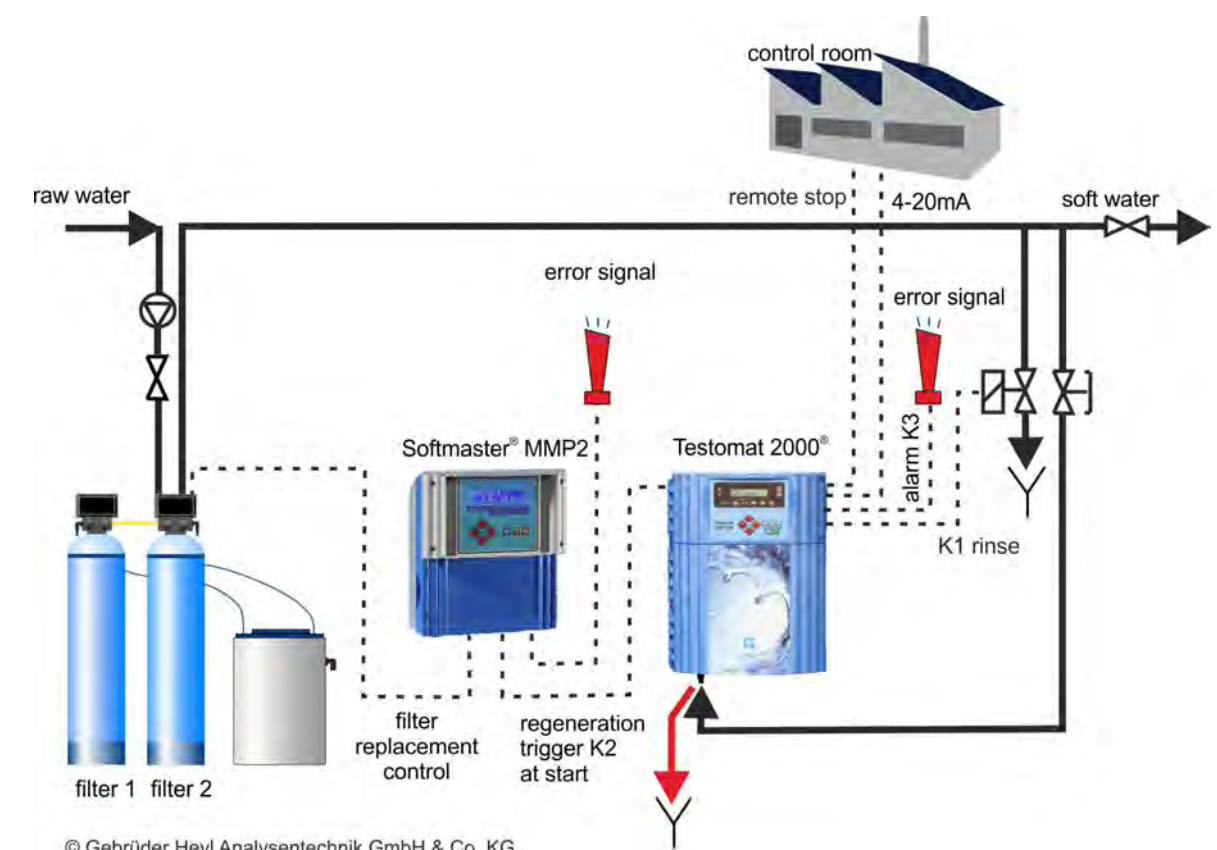

© Gebrüder Heyl Analystechnik GmbH & Co. KG

Boiler house conceptual solution

Desalination

To prevent corrosion caused by salt, the conductivity of the feed water is controlled by the MultiControl monitoring instrument.

The MultiControl monitoring instrument controls the desalination of boiler water with a high salt concentration and regulates the water supply as needed in order to maintain the correct salinity.


The desalination electrode is located in the upper region of the steam generator at the height of the lower water level.



Our **Testomat 2000®** checks the hardness of your feed water and condensate water in your hot water boiler and steam boiler systems according to the current **TÜV WÜ 100** regulation and supports you in maximizing the cost-efficiency of your system.

Boiler house concept with Heyl measuring and control devices

- 1 Softmaster® MMP compact control of softening plant
- 2 Testomat® 2000/ECO/EVO hardness measurement
- 3 Softening plant
- 4 Testomat® PO4 phosphate dosing
- 5 Testomat® SO3 sulfite dosing
- 6 MultiControl
- 7 Condensation collector
- 8 Feed water tank
- 9 Sampling cooler

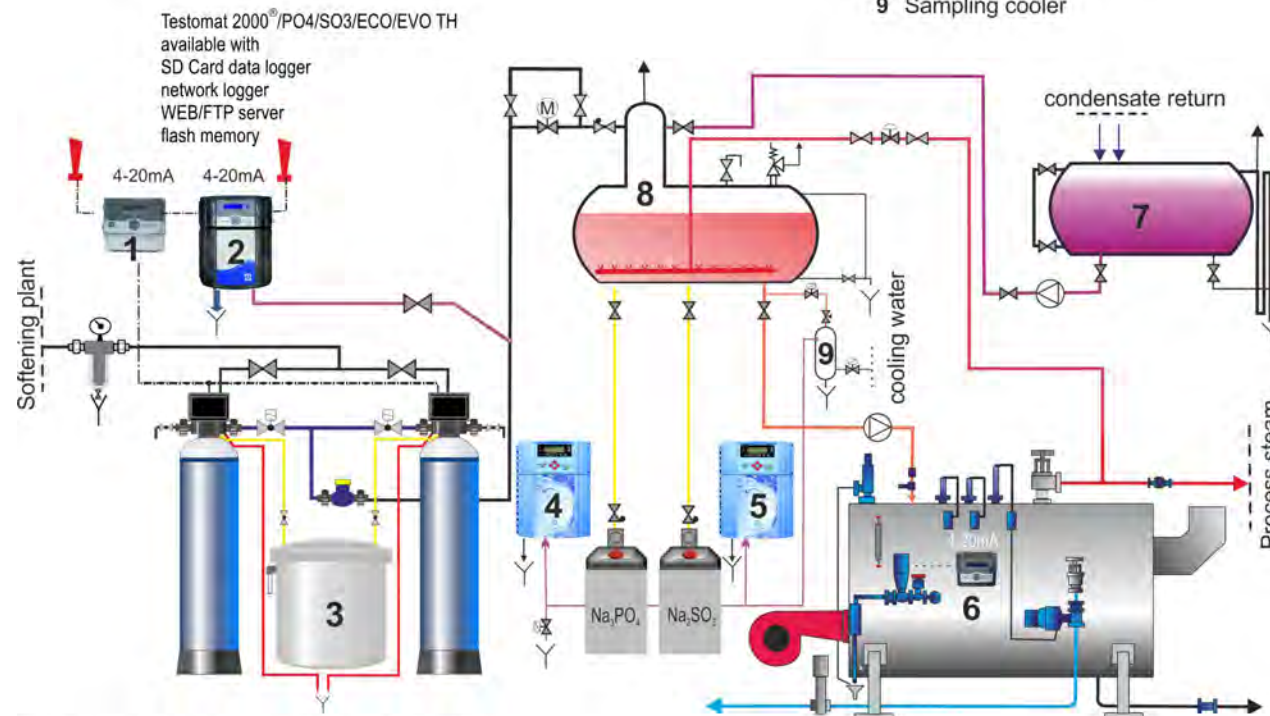

© Gebrüder Heyl Analystechnik GmbH & Co. KG

Reverse osmosis plant conceptual solution

Precise control attuned to the application can contribute to a significant improvement of the entire production process.

Therefore, we made it our mission decades ago to provide our customers with application-oriented solutions in which every individual component is attuned exactly to every other.

Monitoring and control of water treatment example: softening plant

The following Parameters must be monitored:

- quality
- salt deficiency in the brine tank
- correct regeneration cycle

You can achieve this by using our controllers and measuring instruments in combination:

- Testomat 2000®**
- + Softmaster® MMP2**
- + Softmaster® ROE1 and ROE2**

Result:

- less waste water
- lower salt use
- cost savings thanks to lower energy requirements

1- and 2-filter systems

All Softmaster® MMP controllers can be connected to many current valves of 1- and 2-filter systems, e.g., valves from


- Autotrol
- Fleck
- Siata

To support you, you can request connection diagrams for various valves from us or download the current operating instructions from our homepage www.heyhl.de.



Softmaster® controllers monitoring a reverse osmosis system together with Testomat 2000®

- 1 Softmaster® MMP compact control of softening plant
- 2 Testomat® 2000/ECO/EVO hardness measurement
- 3 Softening plant
- 4 Reverse osmosis plant
- 5 Softmaster® ROE1 control of reverse osmosis plant

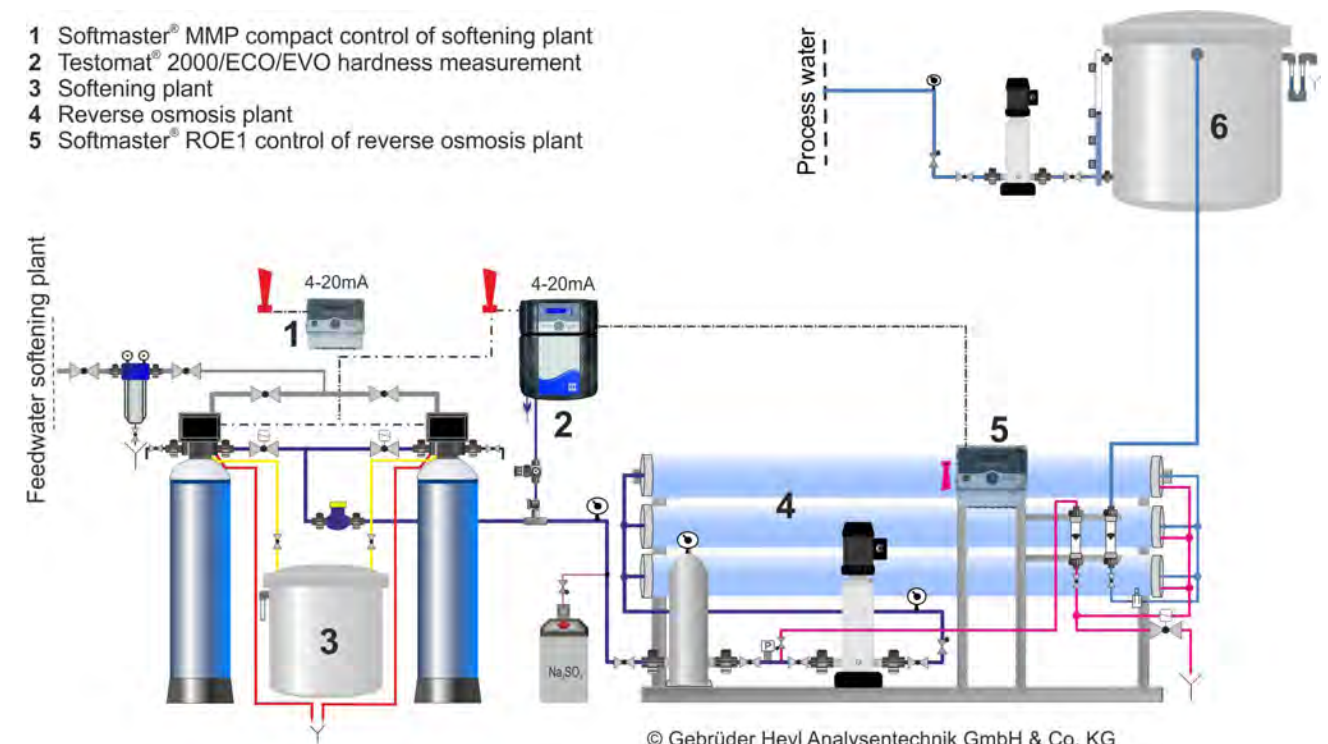

© Gebrüder Heyl Analystechnik GmbH & Co. KG

Recooling plant conceptual solution



Mobile monitoring system for cooling towers with integrated Testomat 2000® Polymer for monitoring the conditioning agent.

Control and monitoring of recooling plants

Today, cooling water controlling and monitoring are indispensable components of advanced energetic and hygiene-compliant operation of cooling towers according to VDI 2047-2 and VDI 3803-3.4.

A wide variety of recooling plants exists worldwide:

- Closed cooling systems
- Semi-open cooling systems
- Continuous flow cooling systems

More than 100,000 recooling plants of the above categories are installed in Germany.

What is the responsibility of the plant operator according to the new VDI 2047-2 directive?

Recooling plants and cooling towers are required in the industry and with large buildings to allow for the quick dissipation of excess heat in production processes or buildings.

Although measures have been employed over the past few years to operate these systems more economically and more safely in terms of hygiene, malfunctions and downtime still often occur due to deposits, corrosion or even

legionella. Because of the design, they consequently spread quickly.

Operators of evaporative cooling systems must therefore still act promptly to avoid mineral-based, corrosive and biological accumulations (such as legionella and pseudomonads).

The legislator has therefore issued a new hygiene directive, VDI 2047 Sheet 2 "Recooling plants - Ensuring the hygiene-compliant operation of evaporative cooling plants". This directive is also referred to as the VDI cooling tower rule.

The duties of the operating company for the prevention of legionella are specifically regulated by this directive.

All plant operators are advised familiarise themselves with the new VDI 2047-2 directive and take the required measures – disregarding the operator's duties may be punishable by law.

To be able to continually ensure the economic, troublefree and – according to the new VDI 2047-2 directive – hygiene-compliant operation of a cooling tower, system conditioning and continuous monitoring of the water are absolutely essential.

What are the main focuses of monitoring?

Part of the cooling water regularly evaporates in open, semi-open and

also closed cooling systems. As a result, the salt concentration in the circulating water rises constantly.

However, the increased salt and mineral content in the circulating water causes limescale buildup, corrosion and mineral deposits in the cooling tower and circulating water system. Drip collectors, trickling filters and distribution channels as well as the heat exchangers in the system are especially affected by this.

This is compounded by biological problems, such as from the formation of algae and biofilms introduced from the supply water and the ambient air.

VDI 3803 stipulates in section 3.4 for evaporative recooling plants that the water condition of the circulating water must be adapted to the building materials of the cooling circuit.

This means that the cooling water should be conditioned without fail to prevent corrosion, inorganic deposits (calcium and magnesium carbonates) as well as organic deposits (algae and bacteria strains) – also called biofilms – from causing major damage in the cooling circuits.

Biofilms, however, can not only cause blockages of fittings and pumps but also constitute the germ cell for legionella or pseudomonas bacteria, which

Recooling plant conceptual solution

are very dangerous for humans.

Biofilms are also energetically equivalent to mineral deposits such as calcium or silicate deposits. A layer of only 1 mm thickness can cause a loss of efficiency up to 30% with both types of deposits. This, in turn, results in additional energy costs of up to 12%.


Conclusion:

A controlled cooling tower system monitored online works in a hygienically compliant manner (according to VDI 2047-2), economically and without malfunctions (according to VDI 3803).



A cooling circuit concept, featuring Heyl analyzers and control devices

Many parameters can be measured in the cooling circuit. Our example shows some of them that you can measure with our measuring instruments. It depends on the application and the parameters to be monitored. You can find an example for desalination in the cooling circuit on page 8.

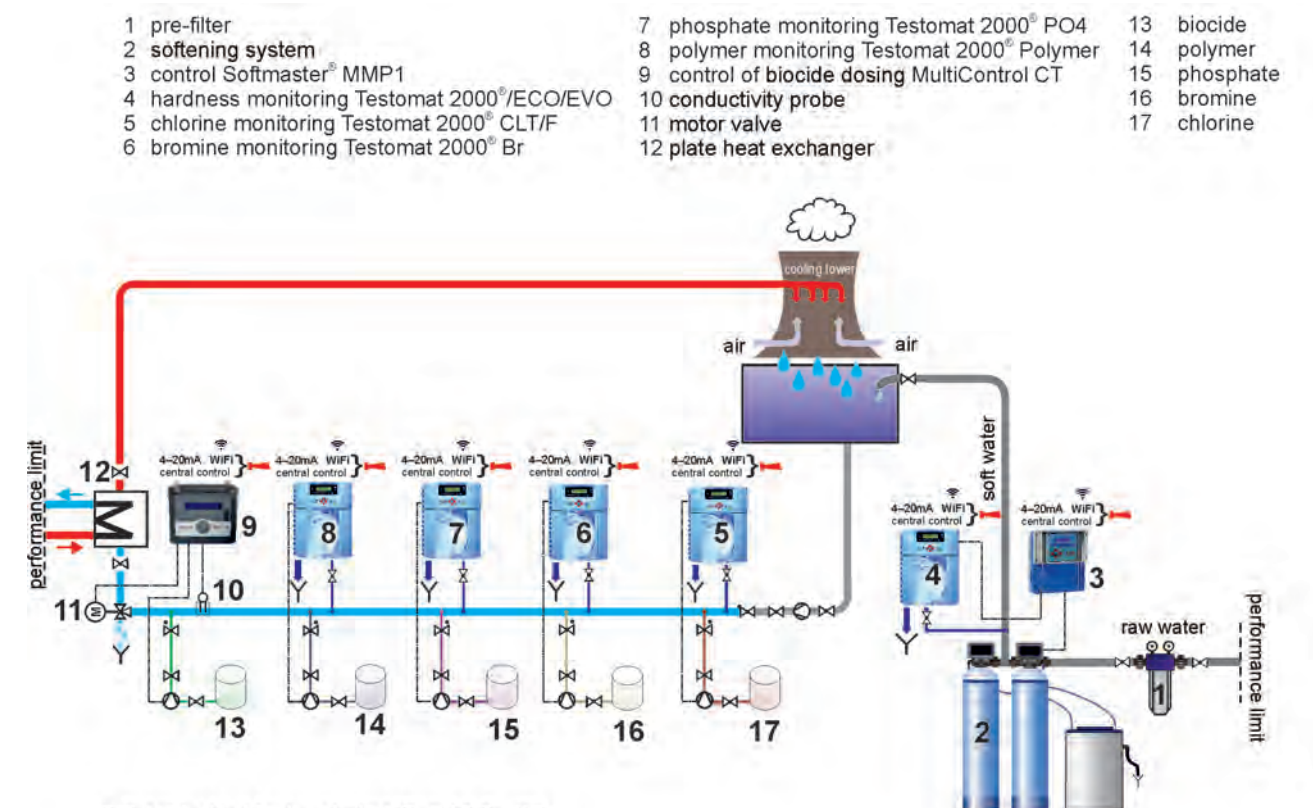

© Gebrüder Heyl Analysentechnik GmbH & Co. KG

Desalination with the automatic desalination device MultiControl CT

Using untreated or partially softened water as the feed water for cooling water circuits or air washers usually causes problems such as:

- Limescale,
- Biological deposits by myxobacteria and algae (bacterial contamination)
- Corrosion of metallic materials.

Automatic monitoring and conditioning of the circulating water is important to prevent this from happening. We have developed the automatic desalination device **MultiControl CT** according to VDI 2047 part 1 and 2 for this application.

- **Desalination** can be controlled either by conductance or by TDS. There is a locking mechanism to stop desalination after a biocide dosing. The duration of desalination can be monitored.
- The **biocide dosing** may either take place after a certain number of days or regularly on certain days of the week at a fixed time. Preliminary desalination is available as an option.
- For quantity-based **inhibitor dosing**, there are various adjustment options available for the dosing point and dosing period.
- **Circulation** may either take place

after a certain number of days or regularly on certain days of the week at a fixed time.

- In addition, **limit values**, for example for temperature (min and max) or pH value (min and max) can be monitored.

By using different plug-in cards in the two existing slots in the device, various sensors, a process controller with 0/4-20 mA input or a curve tracer can be connected.

The following plug-in cards are available in particular:

- Plug-in card for connecting a probe with two current outputs for measuring the inductive conductivity and temperature and for connecting a combination electrode for measuring the pH value.
- Plug-in card for connecting a probe with RS232 interface for measuring the inductive conductivity and temperature.
- Plug-in card for connecting a conductive conductivity probe, a PT100 or PT1000 temperature sensor with 2-, 3- or 4-wire technology and a combination electrode for measuring the pH value.

- Plug-in card with two 0/4-20 mA outputs for outputting the measured values and one RS232 interface for connecting an inductive conductivity probe.

A SD card is used to log measured values, messages, alarms and status changes. Even the firmware can be updated in this way.

There is also the option of a wireless measured value enquiry. To do this, simply replace the SD card used in the device with our **WLAN SD card**. The files can then be loaded via a browser and displayed graphically.

Concept solution for swimming pools

The effect of a too low acid capacity on the water treatment facility and water quality is often underestimated.

Low acid capacity makes it difficult for the pH value in the swimming pool water to stabilize. The pH value in turn affects the filtration effect and therefore the disinfecting potential.

Acid capacity also strongly influences the occurrence of corrosion in parts of the facility that are in contact with water. The water is more aggressive the lower the acid capacity is.

This leads to corrosion on metal components such as pump drives and fiber backstops, untreated concrete water tanks and on gaps between tiles.

DIN 19643 recommends a weekly inspection of acid capacity in order to be able to permanently control the water quality and the state of the surfaces that are in contact with water.

It also recommends a maximum lower limit value of 0.3 mmol for the acid




capacity in Jacuzzis and 0.7 mmol in swimmer's pools.


Through online analysis with the **Testomat ECO® C** the acid capacity can be stabilized automatically

Regular inspection also helps to reduce consumables such as disinfectants and stabilizers and thus helps to save costs.

Water treatment of feed water in cooling circuits with measuring instruments from Gebr. Heyl

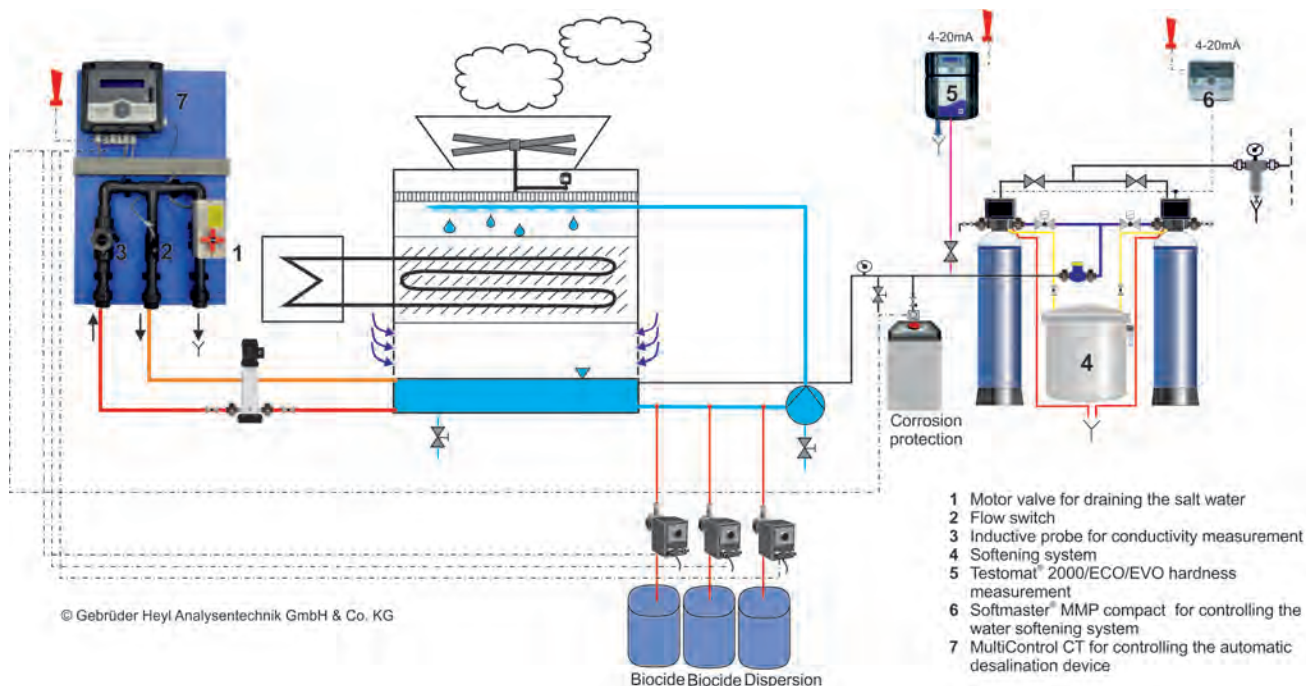

Monitoring carbonate hardness in a swimming pool's water cycle with Gebr. Heyl measuring devices

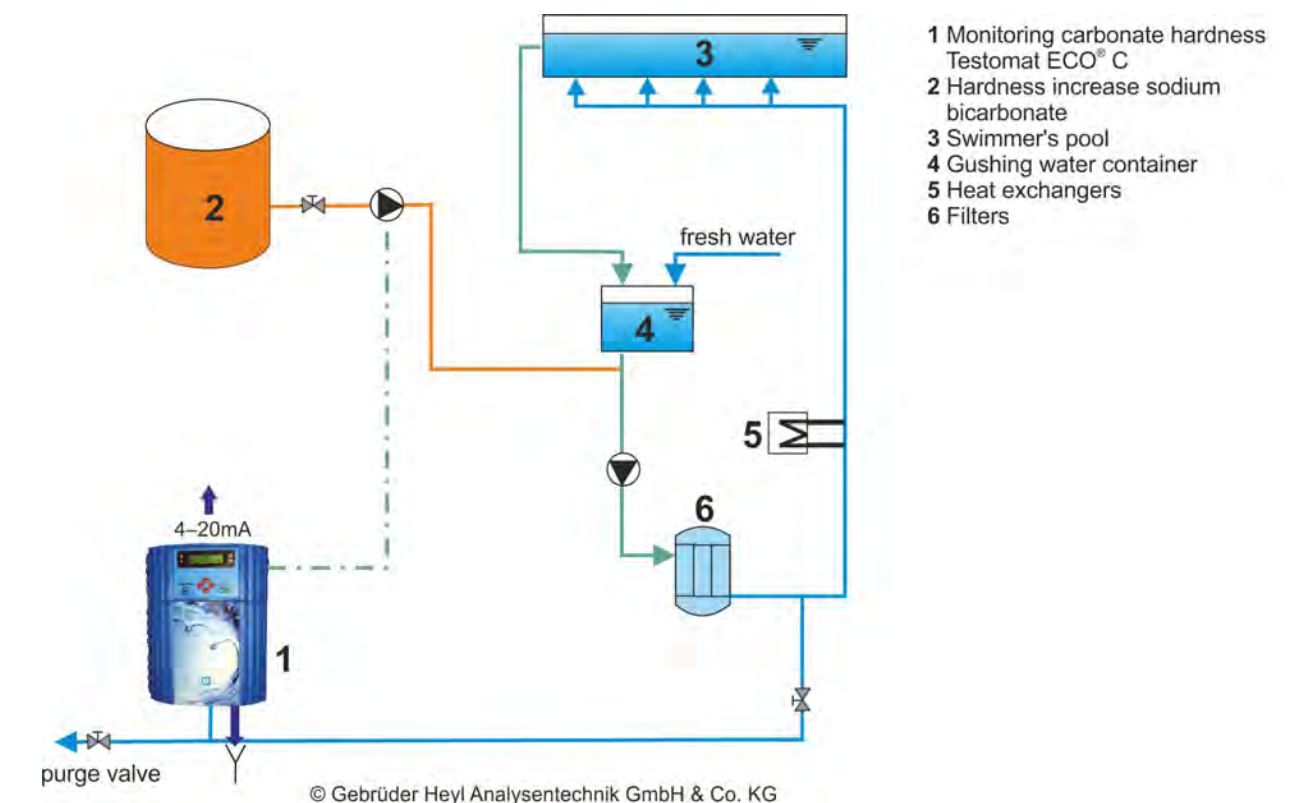

Conceptual solution for treatment plant

When is it necessary to measure phosphate levels?

The measurement of the phosphate content in the wastewater of industrial processes becomes more and more important, because the phosphate values must be lower than the legally permitted values if the wastewater is discharged into the sewer system.

In accordance with § 11 of the German drinking water ordinance of 2001, the limits are 2,2 mg / l phosphorus (6.75 mg / l PO_4) for phosphates added to the drinking water.

Where do phosphates come from?

Phosphates are mainly found in fertilizers and detergents. They are released into the groundwater by agricultural fertilizers in the soil or by domestic wastewater with phosphate detergents. In industrial plants, orthophosphates (PO_4) are directly fed into the processing water to prevent corrosion in their piping systems.

Industrial and agricultural discharges in rivers and lakes lead to a nutrient

surplus in the waters. This results in undesirable algae growth and a falling oxygen content in the water. The ecological balance suffers sustained damage.

Through the water cycle, high amounts of phosphates and nitrates also enter the ground water.

In order to prevent this environmental hazard, policies for the concentration of phosphates and nitrates in water have been established.

Phosphates in Sewage Treatment Plants

In waste water treatment plants, phosphate concentration must be measured in order to ensure effective wastewater treatment. Phosphates are removed either by chemical precipitation or biological elimination from wastewater.

By feeding in dissolved iron salts (ferrous chloride), most of the phosphorus from wastewater is precipitated and deposited along with the contaminants from the primary settlement tank to the bottom of the basin.


Increasingly important in wastewater treatment plants is the phosphate recovery from wastewater and sludge, since phosphorus is an important and finite raw material.

All these processes require an inspection of the phosphate content, which must be either conducted manually or continuously.

The **Testomat 2000® PO4** was developed for the online analysis of orthophosphate and operates within a measuring range of 0 - 10 mg/l PO_4 .

Find the complete technical information on phosphate measurement with the **Testomat 2000® PO4** in the download section of our website www.heyhl.de.

Phosphate measurement at the water treatment plant with the Gebr. Heyl phosphate measuring instrument

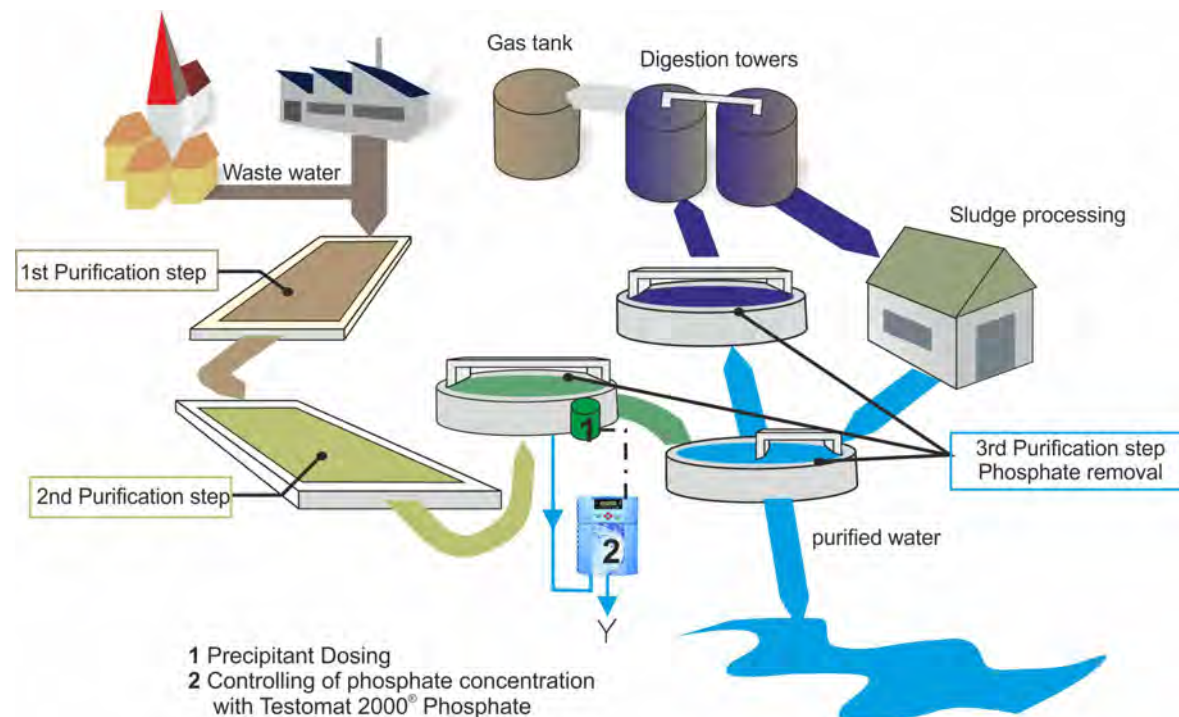

© Gebrüder Heyl Analysentechnik GmbH & Co. KG

Chromate monitoring during the treatment of waste water from electroplating firms

During galvanic processes such as copper plating, chromium plating or nickel plating or during surface treatment before painting (phosphating), large amounts of rinsing water are required after each process step.

Since the disposal of these process waters is very expensive, it makes sense for a company to process and reuse the process waters. The amount of waste water and fresh water can thus be limited.

Heavy metals and toxic constituents are removed during the on-site treatment.

In many cases, a chemical-physical process is used, e.g. ion exchangers. Regeneration of ion exchangers produces solutions with a high concentration of heavy metal salts, from which the metals are either deposited electrolytically or, in some cases, recycled directly to the galvanising baths.

The process water is neutralised with the help of acid or lye. Auxiliary substances and additional reaction steps eliminate any existing critical constituents such as cyanides or chromic acid.



Afterwards, sludge is produced with a flocculant, which removes oils, fats and heavy metals from the water.

The resulting clear phase can then be discharged into the sewer in consideration of the legal limit values.

Limit values for chromium

The Drinking Water Ordinance (TrinkwV 2001/amendment November


2011) prescribes a limit value of 0.05 mg/l chromium in drinking water.

The Waste Water Ordinance (AbwV) sets a limit of 0.05 mg/l chromium in the waste water of chemical industrial companies and a limit value of 0.25 g/t chromium for the iron, steel and malleable-iron foundry.

With a measuring range of 0.0-2.0 mg/l (chromate) and 0-1.0 mg/l (chromium VI), the **Testomat 2000® CrVI** is ideally suited for the required monitoring of these limit values.

Since the monitoring of limit values by the Testomat device takes place automatically online, the level of supervision required by personnel is low and the legal requirements are reliably and demonstrably adhered to and documented through data storage via SD card data loggers.

The analytical result is displayed after a reaction time of approx. 2 minutes. The **Testomat 2000® CrVI 0-5 ppm** can also be used for a broader monitoring range. The measuring range is 0.0-5.0 ppm (chromium VI) and 0.0-11.15 ppm (chromate).

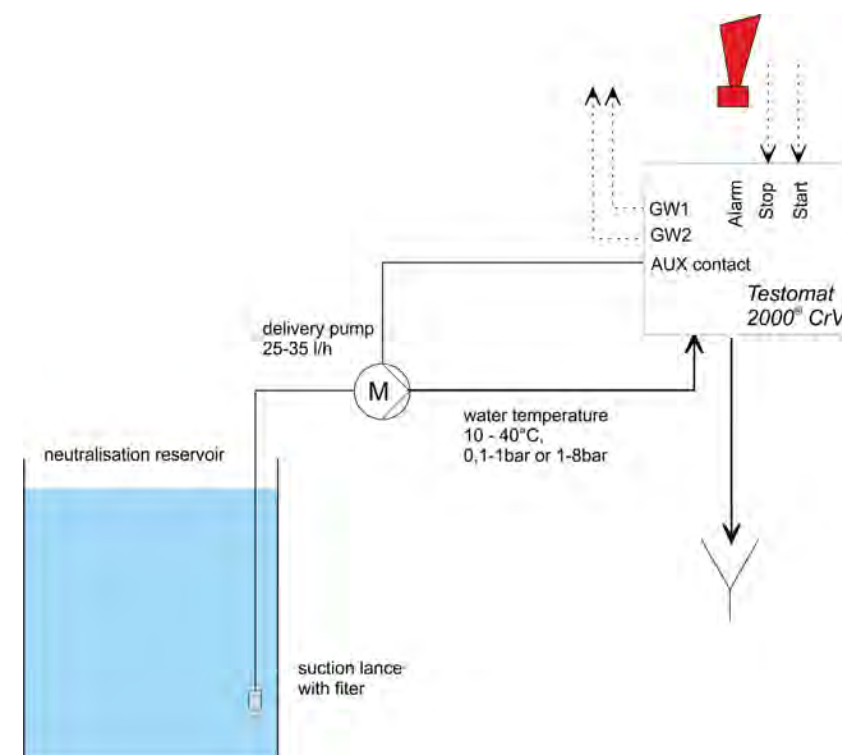

Concept solution for central sterilization

The sterilisation of surgical instruments now plays a central role when it comes to quality assurance in hospitals.

The treatment process is subject to the requirements of the standard DIN EN 285 for steam sterilisation, among others. The steam or water used must not exceed the specified limit values, otherwise deposits and corrosion can occur on the metal surfaces of the instruments.

Demineralised water is therefore generally used for the sterilisation process. This process water (demineralised water) is produced in a water treatment system in the hospital.

DIN EN 285 stipulates the following limit values for the feed water quality to generate pure steam:


- Conductivity: < 15 µS/cm
- pH-value: 5 – 7
- Total hardness: < 0,02 mmol/l
- Salt content: < 10 mg/l
- Phosphate: < 0,5 mg/l
- Silicate (SiO₂): < 1 mg/l
- Chloride: < 2 mg/l


To meet the need of hospitals for a simple, reliable silicate measuring device, Gebr. Heyl Analysentechnik has developed the **Testomat® 808 SiO₂**.






This limit value measuring device can determine silicates in the measurement range from 0.3 to 1.2 ppm and thus corresponds to the specifications of the DIN standard EN 285 for a silicate monitoring device.

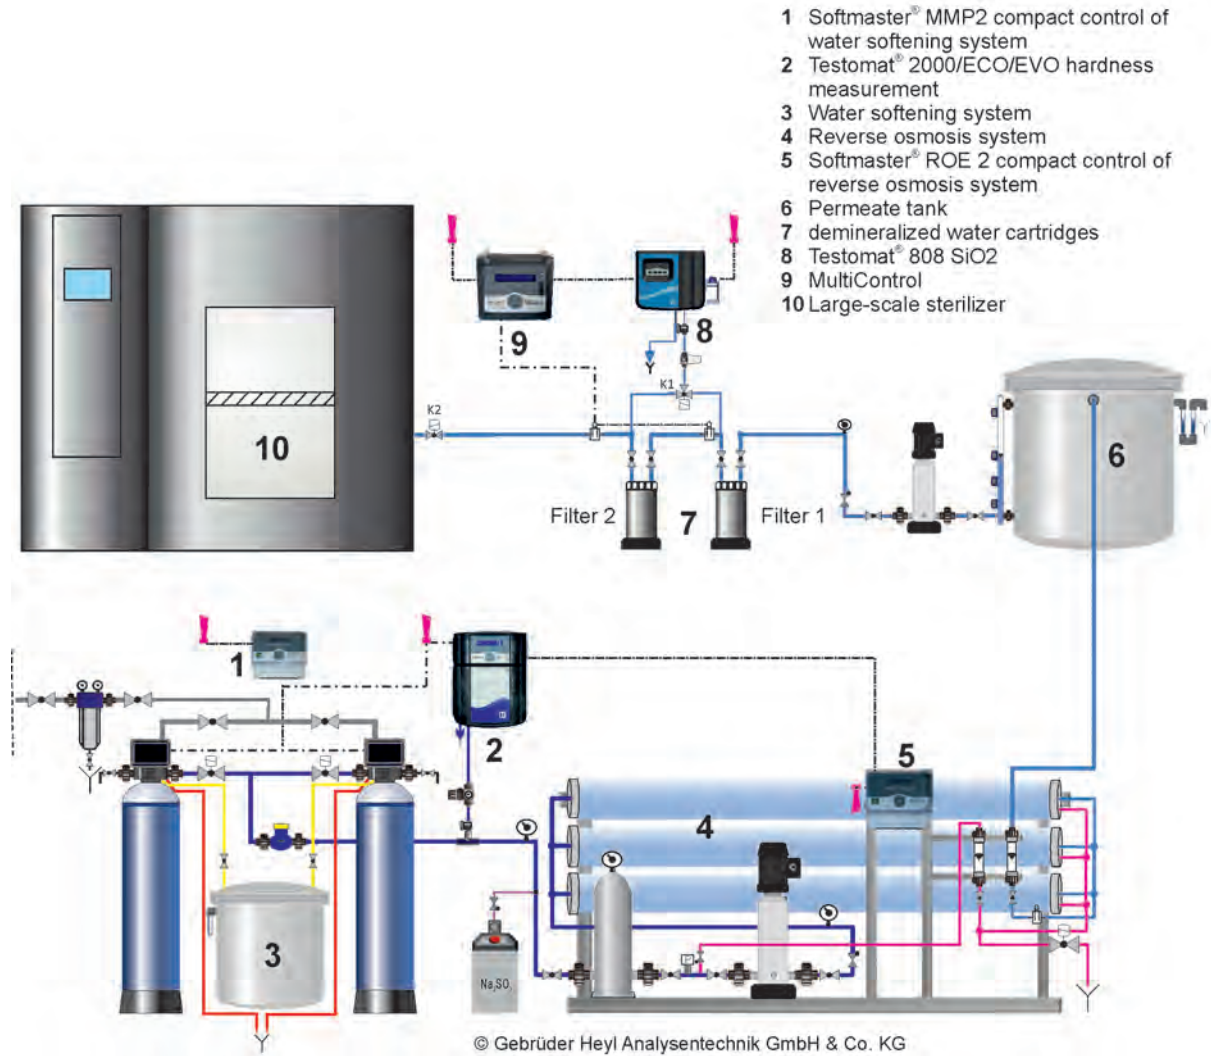


Find the complete technical information on **water treatment in hospitals** in the download section of our website www.heyhl.de.






Water treatment for the central sterilization with Gebr. Heyl measuring and control devices












Product	Testomat® 808 - 2019	Testomat® 808 SiO ₂ - 2019																								
																										
Description	limit value monitoring instrument for water hardness	limit value monitoring instrument for silica																								
Parameters	water hardness	silica SiO ₂																								
Monitoring range	0,02-5 °dH (0,4....89 ppm CaCO ₃)	0,3-1,2 ppm																								
Indicators Limit values on pageSeite 42	Type 300, 300 S, 301, 302, 303, 305, 310, 320, 330, 350	Type A + B for Testomat® 808 SiO ₂																								
Performance profile	<ul style="list-style-type: none">• low water consumption• state-of-the-art electronics• modern indicator pump system• error display• indicator quantity display• external rinsing valve control• limit value evaluation/external control• alarm processing• internal and external rinsing via manual control• 72 hours without supervision possible (in BOB mode)• selector switch for pause interval; selector switch for adjusting the behavior of the relay when the limit value is exceeded	<ul style="list-style-type: none">• Offering all the benefits of the Testomat® 808 - 2019 in addition: <ul style="list-style-type: none">• 2 selector switches for measuring intervals and evaluating limit values																								
Application	applications of continuous residual hardness monitoring, e.g.: <ul style="list-style-type: none">• reverse osmosis plants• soft water for commercial purposes• pure water production plants• galvanization	<ul style="list-style-type: none">• Water treatment of sterilizations in hospitals• Monitoring of silicate content in industrial waters Application example on page 12																								
Protection type/class	IP44 / I	IP44 / I																								
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz																								
Power consumption	max. 16 VA	max. 16 VA																								
Dimensions	approx. 14.3" x 12.4" x 5.4" (W x H x D) 364 x 314 x 138 mm	approx. 14.3" x 12.4" x 5.4" (W x H x D) 364 x 314 x 138 mm with side pocket: 17.4" x 12.4" x 5.4" 442 x 314 x 138 mm																								
Weight	approx. 9.6 lbs (4.35 kg)	approx. 9.6 lbs (4.35 kg)																								
Operating pressure	14.5 to 58 psi (1 to 4 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 58 psi (1 to 4 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)																								
Menu languages	—	—																								
Order numbers	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td>1-4 bar</td><td>100652</td><td>100651</td><td>100650</td></tr><tr><td>0,3-1 bar</td><td>100655</td><td>100654</td><td>100653</td></tr></table>		24V	115 V	230 V	1-4 bar	100652	100651	100650	0,3-1 bar	100655	100654	100653	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td>1-4 bar</td><td>100662</td><td>100661</td><td>100660</td></tr><tr><td>0,3-1 bar</td><td>100665</td><td>100664</td><td>100663</td></tr></table>		24V	115 V	230 V	1-4 bar	100662	100661	100660	0,3-1 bar	100665	100664	100663
	24V	115 V	230 V																							
1-4 bar	100652	100651	100650																							
0,3-1 bar	100655	100654	100653																							
	24V	115 V	230 V																							
1-4 bar	100662	100661	100660																							
0,3-1 bar	100665	100664	100663																							

Product	Testomat® Modul TH	Testomat® Modul CL	Testomat® EVO TH	Testomat® EVO TH CAL
	<div><div>New</div></div>	<div><div>Preview</div></div>	<div><div>C</div><div></div><div>US</div></div>	<div></div>
Description	measuring converter for residual total hardness	measuring converter for total chlorine	Description	automatic online analysis units for water hardness
Parameters	water hardness	total chlorine or free chlorine	Parameters	Water hardness
Measuring range	0,05-25 °dH	0 - 5 ppm (resolution 0,1)	Measuring range	0,05-25 °dH
Indicators	TH 2005, TH 2025, TH 2100, TH 2250 Limit values on pSeite 4040	Chlorine reagent set F (free) or Chlorine reagent set T (total)	Indicators	TH 2005, TH 2025, TH 2100, TH 2250
Performance profile	<ul style="list-style-type: none">• device can be connected to an overriding control system• operation via function keys, which also serve as display elements• parameterisation with the Service Monitor program• output of measurement values via a 4-20 mA interface and a RS232 interface• 3 types of analysis triggers• shared output for the alarm• logging of error and maintenance messages with the SD card• firmware update with the SD card• USB connection for service purposes	<ul style="list-style-type: none">• Offering all the benefits of the Testomat® Modul TH	Performance profile	<ul style="list-style-type: none">• Offering all the benefits of the Testomat ECO® in addition:<ul style="list-style-type: none">• built-in SD card for<ul style="list-style-type: none">– recording data, alarm, errors– firmware updates– importing and exporting settings• optional: WLAN access for wireless read access to the SD card• transfer of measurement data and status via the RS232 port• there is also scope to connect a field bus converter or a converter for telecommunication networks• Operation <0.3 bar with MepuClip®
Application	Monitoring and checking of water quality e.g.: <ul style="list-style-type: none">• water treatment facilities• industrial boilers• process water monitoring	Monitoring the decay behaviour in cooling towers after shock chlorination	Application	Monitoring and checking of water quality e.g.: <ul style="list-style-type: none">• water treatment facilities• industrial boilers• process water monitoring• drinking water systems
Protection type/class	IP54 / I	IP54 / I	Protection type/class	IP44 / I
Supply voltage	24 VDC	24 VDC	Supply voltage	100-240 VAC/ 100-353 VDC
Power consumption	max. 1 A	max. 1 A	Power consumption	max. 30 VA
Dimensions	approx. 10.6" x 13.8" x 5.8" 270 x 350 x 147 mm W x H x D	approx. 10.6" x 13.8" x 5.8" 270 x 350 x 147 mm W x H x D	Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)
Weight	approx. 11.7 lbs (5.3 kg)	approx. 11.7 lbs (5.3 kg)	Weight	approx. 19.8 lbs (9,0 kg)
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)
Relay contact load	max. 35 VAC / 60 VDC; max. 4 A	max. 35 VAC / 60 VDC; max. 4 A	Menu languages	German, English, French, Dutch, Spanish (more upon request)
Order numbers	with cover without cover		Order numbers	housing black housing blue
	24 V			
	116101			
	116102			
			24V	100-240 VAC
			upon request	100701
			upon request	100704
			24V	100-240 VAC
			upon request	upon request
			upon request	100712



Product	Testomat 2000®				Testomat 2000® Antox				Testomat 2000® CAL																																																																																								
																																																																																																	
Description	automatic online analysis units for water hardness				Description	automatic online analysis units for hardness of water with elevated chlorine or H ₂ O ₂ content				automatic online analysis unit for water hardness with additional calibration function																																																																																							
Parameters	water hardness, carbonate hardness, p-value, minus m-value				Parameters	water hardness, carbonate hardness, p-value, minus m-value				water hardness, carbonate hardness, p-value, minus m-value																																																																																							
Measuring range	0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value				Measuring range	0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value				0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value																																																																																							
Indicators	TH 2005, TH 2025, TH 2100, TH 2250 Limit values on pSeite 4040 TC 2050, TC 2100, TM 2005, TP 2100				Indicators	TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100, TM 2005, TP 2100 Limit values on pSeite 4040				TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100, TM 2005, TP 2100																																																																																							
Performance profile	<ul style="list-style-type: none">freely selectable hardness unit: °dH, °f, ppm CaCO₃, or mmol/lhigh measurement accuracy thanks to precise piston dosing pumpmonitoring of two measuring points (switching via external magnet valves)reliable, low-maintenance operationvery simple menu-driven operation and programming via plain-text display <ul style="list-style-type: none">BOB functiontwo independently programmable limit value contacts for monitoring and control tasksrecording of analysis results with optional plug-in card (SK910 current interface) for a point or line recorder (0/4–20 mA), SD card, or printer				Performance profile	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000® in addition:pump for dosing a reducing agent By adding the Antox solution before determining the hardness, the interference by oxidising agents (for example chlorine) is reliably eliminated up to a concentration of 10 mg/l (Antox solution, see page 40).				<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000® in addition:with calibration function																																																																																							
Application	<ul style="list-style-type: none">water treatment plantswater blending plantsdrinking water plantswater softening plants <ul style="list-style-type: none">decarbonization plantsdesalination plantsboiler housescooling towers				Application	<ul style="list-style-type: none">control of water quality in areas where measurement errors can arise due to oxidizing agents				control of water quality for which calibration of the measuring instrument is important, e.g.: <ul style="list-style-type: none">pharmaceutical industry																																																																																							
Protection type/class	IP65 / I				Protection type/class	IP65 / I				IP65 / I																																																																																							
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz				Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz				230–240 VAC, 115 VAC, 24 VAC all 50–60Hz																																																																																							
Power consumption	max. 30 VA				Power consumption	max. 30 VA				max. 30 VA																																																																																							
Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)				Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)				approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)																																																																																							
Weight	approx. 20.9 lbs (9.5 kg)				Weight	approx. 20.9 lbs (9.5 kg)				approx. 20.9 lbs (9.5 kg)																																																																																							
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)				Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)				14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)																																																																																							
Menu languages	German, English, French, Italian, Polish, Dutch				Menu languages	German, English				German, English, French, Italian																																																																																							
Order numbers	<table><tr><td></td><td>24V</td><td>115 V</td><td>230 V</td></tr><tr><td>German</td><td>100090</td><td>100100</td><td>100095</td></tr><tr><td>German without front sticker</td><td>100420</td><td>100421</td><td>100422</td></tr><tr><td>English</td><td>100091</td><td>100101</td><td>100096</td></tr><tr><td>French</td><td>100092</td><td>100102</td><td>100097</td></tr><tr><td>Italian</td><td>100093</td><td>100103</td><td>100098</td></tr><tr><td>Polish</td><td>100094</td><td>100104</td><td>100099</td></tr><tr><td>Dutch</td><td>100011</td><td>100012</td><td>100013</td></tr><tr><td>Spanish</td><td>100014</td><td>100015</td><td>100016</td></tr></table>					24V	115 V	230 V	German	100090	100100	100095	German without front sticker	100420	100421	100422	English	100091	100101	100096	French	100092	100102	100097	Italian	100093	100103	100098	Polish	100094	100104	100099	Dutch	100011	100012	100013	Spanish	100014	100015	100016	Order numbers	<table><tr><td></td><td>24V</td><td>115 V</td><td>230 V</td></tr><tr><td>German</td><td>100440</td><td>100450</td><td>100460</td></tr><tr><td>English</td><td>100441</td><td>100451</td><td>100461</td></tr><tr><td>French</td><td></td><td></td><td></td></tr><tr><td>Italian</td><td></td><td></td><td></td></tr><tr><td>Dutch</td><td></td><td></td><td></td></tr></table>					24V	115 V	230 V	German	100440	100450	100460	English	100441	100451	100461	French				Italian				Dutch				<table><tr><td></td><td>24V</td><td>115 V</td><td>230 V</td></tr><tr><td></td><td>100210</td><td>100215</td><td>100220</td></tr><tr><td></td><td>100211</td><td>100216</td><td>100221</td></tr><tr><td></td><td>100212</td><td>100217</td><td>100222</td></tr><tr><td></td><td>100213</td><td>100218</td><td>100223</td></tr><tr><td></td><td>100214</td><td>100219</td><td>100224</td></tr></table>					24V	115 V	230 V		100210	100215	100220		100211	100216	100221		100212	100217	100222		100213	100218	100223		100214	100219	100224
	24V	115 V	230 V																																																																																														
German	100090	100100	100095																																																																																														
German without front sticker	100420	100421	100422																																																																																														
English	100091	100101	100096																																																																																														
French	100092	100102	100097																																																																																														
Italian	100093	100103	100098																																																																																														
Polish	100094	100104	100099																																																																																														
Dutch	100011	100012	100013																																																																																														
Spanish	100014	100015	100016																																																																																														
	24V	115 V	230 V																																																																																														
German	100440	100450	100460																																																																																														
English	100441	100451	100461																																																																																														
French																																																																																																	
Italian																																																																																																	
Dutch																																																																																																	
	24V	115 V	230 V																																																																																														
	100210	100215	100220																																																																																														
	100211	100216	100221																																																																																														
	100212	100217	100222																																																																																														
	100213	100218	100223																																																																																														
	100214	100219	100224																																																																																														

Product	Testomat 2000® self clean			Testomat 2000® V			Testomat 2000® DUO			Testomat 2000® DUO CN			Testomat 2000® CN	
														
Description	automatic online analysis units for water hardness with cleaning function for difficult water			automatic online analysis unit for water hardness for regulating blending water			automatic online analysis units for water hardness for monitoring two measuring points			automatic online analysis units for water hardness for monitoring two measuring points for the Chinese market			automatic online analysis unit for water hardness for the Chinese market, with Chinese menu navigation	
Parameters	water hardness, carbonate hardness, p-value, minus m-value			Water hardness, Carbonate hardness			water hardness, carbonate hardness, p-value, minus m-value			water hardness, carbonate hardness, p-value, minus m-value			water hardness, carbonate hardness, p-value, minus m-value	
Measuring range	0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value			1,0–25,0 °dH water hardness 1,0–20,0 °dH carbonate hardness			0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value			0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value			0,05-25 °dH water hardness 0,5-20 °dH carbonate hardness 0,1-15 mmol/l p-value 0,05-0,5 mmol/l minus m-value	
Indicators Limit values on pSeite 4040	TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100, TM 2005, TP 2100			TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100,			TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100, TM 2005, TP 2100			TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100, TM 2005, TP 2100			TH 2005, TH 2025, TH 2100, TH 2250, TC 2050, TC 2100, TM 2005, TP 2100	
Performance profile	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:with dosing pump for dosing our cleaning agent for cleaning the measuring chamber after analysis For the cleaning solution see page 40			<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:suitable in connection with a 3/2-way motor valve with 0/4–20 mA interface as a control system for water hardness and carbonate hardness of blending waterthe selection of the reagent determines the working range of the controller (= measuring range)			<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:monitoring of two different measuring points with different indicator types, e.g. water hardness with different measurement ranges or water hardness and carbonate hardnessautomatic switching between measuring pointsone input available for limiting measuring point 1			<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000® DUOin addition:Chinese menu navigation for the Asian market			<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:Chinese menu navigation for the Asian market	
Application	<ul style="list-style-type: none">use for difficult water, e.g. calcium, biofilms, various other depositsextending service lifereducing contamination in the measuring chamber			<ul style="list-style-type: none">regulation of water blending systems (cooling circuits, process water)			<ul style="list-style-type: none">use in two circuits with different hardnessesmeasurement of inlet and outlet hardness			<ul style="list-style-type: none">use in two circuits with different hardnessesmeasurement of inlet and outlet hardness			<ul style="list-style-type: none">the same areas of application such as Testomat 2000®	
Protection type/class	IP65 / I			IP65 / I			IP65 / I			IP65 / I			IP65 / I	
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	
Power consumption	max. 30 VA			max. 30 VA			max. 30 VA			max. 30 VA			max. 30 VA	
Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)	
Weight	approx. 20.9 lbs (9.5 kg)			approx. 20.9 lbs (9.5 kg)			approx. 20.9 lbs (9.5 kg)			approx. 20.9 lbs (9.5 kg)			approx. 20.9 lbs (9.5 kg)	
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	
Menu languages	German, English			German, English, French, Italian			German, English, French, Italian, Polish			Mandarin and English			Mandarin and English	
Order numbers	24V 115 V 230 V			24V 115 V 230 V			24V 115 V 230 V			24V 115 V 230 V			230 V	
	German	100380	100390	100370	100170	100175	100180	German	100290	100295	100300	Mandarin	110219	110212
	German without front sticker	—	—	100365	—	—	—	English	100291	100296	100301			
	English	100381	100391	100371	100171	100176	100181	French	100292	100297	100302			
	French	100382	100392	100372	100172	100177	100182	Italian	100293	100298	100303			
	Italian				100173	100178	100183	Polish	100294	100299	100304			110215

Product	Testomat 2000® THCL	Testomat 2000® CLO2	Testomat 2000® CLF	Testomat 2000® CLT	Testomat 2000® CLT self clean																																																																																												
																																																																																																	
Description	automatic online analysis unit for determining total chlorine and water hardness	automatic online analysis unit for determining chlorine dioxide content	automatic online analysis unit for determining chlorine content	automatic online analysis unit for determining chlorine content	automatic online analysis unit for determining chlorine content with cleaning function for difficult water																																																																																												
Parameters	total chlorine water hardness	chlorine dioxide ClO ₂	free chlorine	total chlorine or free chlorine	total chlorine																																																																																												
Measuring range (resolution)	0,00-0,99 mg/l (0,01) 1,0-2,5 mg/l (0,1) 0,25-2,5°dH (0,05) } total chlorine water hardness	0,00-1,88 mg/l (0,02) 1,9-4,7 mg/l (0,2)	0,00-0,99 mg/l (0,01) 1,0-2,5 mg/l (0,1)	total chlorine or 0,00-0,99 mg/l 1,0-2,5 mg/l free chlorine 0,00-0,99 mg/l 1,0-2,5 mg/l	0,00-0,99 mg/l (0,01) 1,0-2,5 mg/l (0,1)																																																																																												
Indicators Limit values on pSeite 4041	TH 2025, CL 2250 A, CL 2250 B, CL 2250 C	CLO2 reagent set A and B	CL 2250 A, CL 2250 B	CL 2250 A, CL 2250 B, CL 2250 C	CL 2250 A, CL 2250 B, CL 2250 C																																																																																												
Performance profile	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:combination of total chlorine and hardness measuring instrument	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. one minute	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. one minute	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. one minutecan be converted for CLF (free chlorine)	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. one minutewith dosing pump for dosing our cleaning agent for cleaning the measuring chamber after analysis (see page 39)																																																																																												
Application	<ul style="list-style-type: none">medical technology (dialysis)corrosion protectionprotection for reverse osmosis membranesmonitoring of softener and chlorination systems for drinking water or swimming pools	<ul style="list-style-type: none">disinfectant monitoring for drinking water and process water	<ul style="list-style-type: none">monitoring of chlorination systems for drinking water/swimming pool waterprotection for reverse osmosis membranesmonitoring of biocides and conditioning agents containing chlorine	<ul style="list-style-type: none">monitoring of chlorination systems for drinking water/swimming pool waterprotection for reverse osmosis membranesmonitoring of biocides and conditioning agents containing chlorine	<ul style="list-style-type: none">disinfectant monitoring for drinking water and process watermedical technology (dialysis)																																																																																												
Protection type/class	IP65 / I	IP65 / I	IP65 / I	IP65 / I	IP65 / I																																																																																												
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz																																																																																												
Power consumption	max. 30 VA	max. 30 VA	max. 30 VA	max. 30 VA	max. 30 VA																																																																																												
Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)																																																																																												
Weight	approx. 20.9 lbs (9.5 kg)	approx. 20.9 lbs (9.5 kg)	approx. 20.9 lbs (9.5 kg)	approx. 20.9 lbs (9.5 kg)	approx. 20.9 lbs (9.5 kg)																																																																																												
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)																																																																																												
Menu languages	German, English, French, Italian	German, English, French	German, English, French, Italian	German, English, French, Italian	German, English, French																																																																																												
Order numbers	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td>German</td><td>100270</td><td>100275</td><td>100280</td></tr><tr><td>English</td><td>100271</td><td>100276</td><td>100281</td></tr><tr><td>French</td><td>100272</td><td>100277</td><td>100282</td></tr><tr><td>Italian</td><td>100273</td><td>100278</td><td>100283</td></tr></table>		24V	115 V	230 V	German	100270	100275	100280	English	100271	100276	100281	French	100272	100277	100282	Italian	100273	100278	100283	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td></td><td>100500</td><td>100505</td><td>100510</td></tr><tr><td></td><td>100501</td><td>100506</td><td>100511</td></tr><tr><td></td><td>100502</td><td>100507</td><td>100512</td></tr></table>		24V	115 V	230 V		100500	100505	100510		100501	100506	100511		100502	100507	100512	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td>German</td><td>100230</td><td>100235</td><td>100240</td></tr><tr><td>English</td><td>100231</td><td>100236</td><td>100241</td></tr><tr><td>French</td><td>100232</td><td>100237</td><td>100242</td></tr><tr><td>Italian</td><td>100233</td><td>100238</td><td>100243</td></tr></table>		24V	115 V	230 V	German	100230	100235	100240	English	100231	100236	100241	French	100232	100237	100242	Italian	100233	100238	100243	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td></td><td>100130</td><td>100135</td><td>100140</td></tr><tr><td></td><td>100131</td><td>100136</td><td>100141</td></tr><tr><td></td><td>100132</td><td>100137</td><td>100142</td></tr><tr><td></td><td>100133</td><td>100138</td><td>100143</td></tr></table>		24V	115 V	230 V		100130	100135	100140		100131	100136	100141		100132	100137	100142		100133	100138	100143	<table><tr><th></th><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td></td><td>upon request</td><td>upon request</td><td>100245</td></tr><tr><td></td><td>upon request</td><td>100256</td><td>100246</td></tr><tr><td></td><td>upon request</td><td>upon request</td><td>100247</td></tr></table>		24V	115 V	230 V		upon request	upon request	100245		upon request	100256	100246		upon request	upon request	100247
	24V	115 V	230 V																																																																																														
German	100270	100275	100280																																																																																														
English	100271	100276	100281																																																																																														
French	100272	100277	100282																																																																																														
Italian	100273	100278	100283																																																																																														
	24V	115 V	230 V																																																																																														
	100500	100505	100510																																																																																														
	100501	100506	100511																																																																																														
	100502	100507	100512																																																																																														
	24V	115 V	230 V																																																																																														
German	100230	100235	100240																																																																																														
English	100231	100236	100241																																																																																														
French	100232	100237	100242																																																																																														
Italian	100233	100238	100243																																																																																														
	24V	115 V	230 V																																																																																														
	100130	100135	100140																																																																																														
	100131	100136	100141																																																																																														
	100132	100137	100142																																																																																														
	100133	100138	100143																																																																																														
	24V	115 V	230 V																																																																																														
	upon request	upon request	100245																																																																																														
	upon request	100256	100246																																																																																														
	upon request	upon request	100247																																																																																														


Product	Testomat 2000® Br				Testomat 2000® CrVI Testomat 2000® CrVI 0-5ppm				Testomat 2000® Fe				Testomat 2000® PO4				Testomat 2000® Polymer																					
																																						
Description	automatic online analysis unit for determining bromine content				automatic online analysis unit for determining chromate or chromium VI content				automatic online analysis unit for determining iron content				automatic online analysis unit for determining phosphate content				automatic online analysis unit for determining polyacrylate content																					
Parameters	bromine Br ₂				chromate (CrO ₄ ²⁻) or chromium VI (CrVI)				iron (Fe (I I), Fe (I I I))				phosphate PO ₄				anionic polyacrylates																					
Measuring range (resolution)	0,00-2.23 mg/l and 2.3-5.6 mg/l				<table><tr><td>Type</td><td>CrVI</td><td>CrVI 0-5ppm</td><td>resol.</td></tr><tr><td rowspan="3">Chromate</td><td>0,00 - 0,99</td><td>0,00 - 0,99</td><td>0,01</td></tr><tr><td>1,0-2,0</td><td>1,0-3,0</td><td>0,1</td></tr><tr><td>-</td><td>3,0 - 5,0</td><td>0,2</td></tr><tr><td>Chromium</td><td>0,00 - 0,99</td><td>0,00 - 11,15</td><td>0,01</td></tr></table>				Type	CrVI	CrVI 0-5ppm	resol.	Chromate	0,00 - 0,99	0,00 - 0,99	0,01	1,0-2,0	1,0-3,0	0,1	-	3,0 - 5,0	0,2	Chromium	0,00 - 0,99	0,00 - 11,15	0,01	0,00-0,65 mg/l and 0,7-1,0 mg/l				0,0 - 7,0 mg/l (0,1) 7,0 - 10,0 mg/l (0,25)				customer-specific, e.g. 0,0-50,0 mg/l			
Type	CrVI	CrVI 0-5ppm	resol.																																			
Chromate	0,00 - 0,99	0,00 - 0,99	0,01																																			
	1,0-2,0	1,0-3,0	0,1																																			
	-	3,0 - 5,0	0,2																																			
Chromium	0,00 - 0,99	0,00 - 11,15	0,01																																			
Indicators Limit values on pageSeite 40	bromine reagent set				CrVI 2100 A, CrVI 2100 B				FE 2005 A, FE 2005 B				PO4 reagent set 2100				It is necessary to customize the Testomat 2000® Polymer because of the large amount of polyacrylats, which can be measured with this unit. Either use your existing reagents or use our polymer reagents.																					
Performance profile	<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. one minute				<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. 2 to 3 minutes				<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. 7 minutes				<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. 10 minuteschoose between the 500 ml bottles or the large reagent containers (20 and 5 litre containers)				<ul style="list-style-type: none">Offering all the benefits of the Testomat 2000®in addition:the analysis result is displayed after a reaction time of approx. 7 minutesscaling factor adjustable from 0.01 to 99,99 to accommodate the re-agents used																					
Application	<ul style="list-style-type: none">monitoring the dosing of disinfectant				<ul style="list-style-type: none">monitoring of chromate content waste water in galvanization plantscontrol of waste water in the metalworking industry <p>Application example on page 11</p>				<ul style="list-style-type: none">monitoring of systems for removing iron from well watercontrolling industrial or drinking water				<ul style="list-style-type: none">monitoring of process waterconditioning of production watertreated wastewater (sewage treatment plants, biogas plants)online – environmental analysis <p>Application example on page 10</p>				<ul style="list-style-type: none">monitoring of conditioning agents in cooling and heating circuits																					
Protection type/class	IP65 / I				IP65 / I				IP65 / I				IP65 / I				IP65 / I																					
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz				230–240 VAC, 115 VAC, 24 VAC all 50–60Hz				230–240 VAC, 115 VAC, 24 VAC all 50–60Hz				230–240 VAC, 115 VAC, 24 VAC all 50–60Hz				230–240 VAC, 115 VAC, 24 VAC all 50–60Hz																					
Power consumption	max. 30 VA				max. 30 VA				max. 30 VA				max. 30 VA				max. 30 VA																					
Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)				approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)				approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)				approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)				approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)																					
Weight	approx. 20.9 lbs (9.5 kg)				approx. 20.9 lbs (9.5 kg)				approx. 20.9 lbs (9.5 kg)				approx. 20.9 lbs (9.5 kg)				approx. 20.9 lbs (9.5 kg)																					
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)				14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)				14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)				14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)				14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)																					
Menu languages	German, English, French				German, English, French,				German, English, French. Dutch, Italian, Polish				German, English, French, Dutch, Spanish				German, English, French																					
Order numbers	German	24V	115 V	230 V	Type	24V	115 V	230 V	German	24V	115 V	230 V	24V	115 V	230 V	24V	115 V	230 V																				
		100520	100525	100530		CrVI	100310	100315		100320	100560	100565							100570	upon request	upon request	100470																
		100521	100526	100531			100311	100316		100321	100561	100566							100571	upon request	100472	100473																
	100522	100527	100532	100312	100317		100322	100562	100567	100572	upon request	upon request	100471																									
	German				CrVI 0-5ppm	request	request	100640	Polish	100153	100158	100163	—	—	—																							
		English	request	request		100641	100154	100159		100164	—	—	—																									
			request	request		request	100186	100187		100188	100563	upon request	100573																									
	English				French				Dutch.	—	—	—	100564	100568	upon request																							
	French																																					

Product	Testomat 2000® SO3			Titromat® TH			Titromat® KH			Titromat® M1			Titromat® M2					
																		
Description	automatic online analysis unit for determining sulfite content			automatic titration unit for determining water hardness			automatic titration unit for determining carbonate hardness			automatic titration unit for determining carbonate hardness			automatic titration unit for determining carbonate hardness					
Parameters	sulfite SO ₃ ²⁻			water hardness			carbonate hardness			carbonate hardness (m-value)			carbonate hardness (m-value)					
Measuring range (resolution)	0,0-5 mg/l (0,1) 5 - 10 mg/l (0,5) 10-50 mg/l (1)			2,5-50,0 °dH (2,5)			5-150 °KH (5) 2-60 °KH (2)			0,05-1,00 °dH (0,025) 0,09-1,80 °f (0,045)			0,05-2,00 °dH (0,05) 0,09-3,60 °f (0,09)					
Indicators Limit values on pageSeite 40	Sulfite reagent A Sulfite reagent B			TH 2500 reagent A, TH 2500 reagent B			TC 2150 reagent A, TC 2150 reagent B			TC 2010 reagent A, TC 2010 reagent B			TC 2020 reagent A, TC 2020 reagent B					
Performance profile	• Offering all the benefits of the Testomat 2000® in addition: • the analysis result is displayed after a reaction time of approx. 3 minutes			• Offering all the benefits of the Testomat 2000®			• Offering all the benefits of the Testomat 2000® • special for high hardness measuring ranges			• Offering all the benefits of the Testomat 2000® • special for low hardness measuring ranges			• Offering all the benefits of the Testomat 2000® • special for low hardness measuring ranges					
Application	• monitoring of boiler feed water in steam boiler systems (sulfite for oxygen binding) Application example on page 4			• drinking water production and supply, • raw water monitoring			• alkalinity of open coolant circuits			• corrosion monitoring in boiler feed water, • residual alkalinity after decarbonization (e.g., breweries)			• corrosion monitoring in boiler feed water, • residual alkalinity after decarbonization (e.g., breweries)					
Protection type/class	IP65 / I			IP65 / I			IP65 / I			IP65 / I			IP65 / I					
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz			230–240 VAC, 115 VAC, 24 VAC all 50–60Hz					
Power consumption	max. 30 VA			max. 30 VA			max. 30 VA			max. 30 VA			max. 30 VA					
Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)			approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)					
Weight	approx. 9,5 kg			approx. 9,5 kg			approx. 9,5 kg			approx. 9,5 kg			approx. 9,5 kg					
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)			14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)					
Menu languages	German, English			German, English, French, Italian			German, English, French			German, English, French			German, English, French					
Order numbers		24V	115 V	230 V		24V	115 V	230 V		24V	115 V	230 V		24V	115 V	230 V		
	German	100350	100355	100360	110110	110115	110120		German	110190	110195	110200	110150	110155	110160	110130	110135	110140
	English	100351	100356	100361	110111	110116	110121		English	110191	110196	110201	110151	110156	110161	110131	110136	110141
	French				110112	110117	110122		French	110192	110197	110202	110152	110157	110162	110132	110137	110142
	Italian				110113	110118	110123											












Product	Testomat ECO®	Testomat ECO® C															
																	
Description	automatic online analysis units for water hardness	automatic online analysis units for carbonate hardness															
Parameters	Water hardness	Carbonate hardness Acid capacity															
Measuring range	0,05-25 °dH	0,18-3,58 mmol/l / 0,36-7,16 mmol/l 0,5-10,0 °dH / 1,0-20,0°dH															
Indicators	TH 2005, TH 2025, TH 2100, Limit values on pageSeite 40 TH 2250	TC 2050, TC 2100															
Performance profile	<ul style="list-style-type: none">freely selectable hardness unit: °dH, °f, ppm CaCO₃ or mmol/lhigh measurement accuracy thanks to precise piston dosing pumptwo independent limit values (choice of 1, 2, or 3 bad analyses before the limit value relay switches) and adjustable switching functionsreliable, low-maintenance operationvery simple menu-driven operation and programming via plain-text displaytwo neutral changeover contactserror message output (neutral changeover)current output 0/4–20 mABOB function	<ul style="list-style-type: none">Offering all the benefits of the Testomat ECO® <div>deviating from this:</div> <ul style="list-style-type: none">determinable measuring of carbonate hardness/acid capacity in mmol/l via indicator selectionno BOB function															
Application	monitoring and control of water quality, e.g.: <ul style="list-style-type: none">water treatment plantsdrinking water plants	monitoring and control of water quality, e.g.: <ul style="list-style-type: none">water treatment plantsdrinking water plantsSwimming pool water automatic hardness increase of swimming pool water via online analysis (application page 9)															
Protection type/class	IP65 / I	IP65 / I															
Supply voltage	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz	230–240 VAC, 115 VAC, 24 VAC all 50–60Hz															
Power consumption	max. 30 VA	max. 30 VA															
Dimensions	approx. 15" x 18.9" x 11" 380 x 480 x 280 mm (W x H x D)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)															
Weight	approx. 19.8 lbs (9.0 kg)	approx. 20.9 lbs (9.5 kg)															
Operating pressure	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)	14.5 to 116 psi (1 to 8 bar) or 4.4 to 14.5 psi (0.3 to 1 bar)															
Menu languages	German, English, French, Italian, Polish, Dutch, Spanish	German, English, French, Dutch															
Order numbers	<table><tr><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td>100112</td><td>100117</td><td>100122</td></tr><tr><td>100430</td><td>100431</td><td>100432</td></tr></table> <div>without front sticker</div>	24V	115 V	230 V	100112	100117	100122	100430	100431	100432	<table><tr><th>24V</th><th>115 V</th><th>230 V</th></tr><tr><td>100115</td><td>100116</td><td>100121</td></tr></table>	24V	115 V	230 V	100115	100116	100121
24V	115 V	230 V															
100112	100117	100122															
100430	100431	100432															
24V	115 V	230 V															
100115	100116	100121															


Selection help




Our Testomat devices have many uses in water analysis. This table will help you find the Testomat device suited to your needs.




	chlorination systems	decarbonization systems	iron removal systems	water softening systems	galvanization	boiler feed water	sewage treatment plants	cooling towers	medical technology	with dosing of antioxidants	with calibration function	with self-cleaning measuring chamber	osmosis systems	swimming pool	sterilisation/hospitals	drinking water supply	monitoring disinfectant dosing	monitoring chromate content	monitoring conditioning agents	monitoring two measuring points	water treatment	water blending
Testomat® 808	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat® 808 SiO2	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat ECO®	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat® EVO TH	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat® EVO TH CAL	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat ECO® C	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000®	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® Antox	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® BR	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® CAL	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® CLO2	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® CLF	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® CLT	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000 CLT self clean®	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® CN	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® CrVI	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® DUO	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® DUO CN	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® Fe	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® PO4	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® Polymer	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® self clean	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® SO3	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® THCL	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
Testomat 2000® V	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇

⬇ especially appropriate ⬇ appropriate ⬇ not appropriate

Accessories Testomat® / Titromat®	Testomat 2000® connection kit	Connection set	Conversion kit for water connection	SK 910 current interface	RS 910 interface card	UK 910 voltage interface
						
Is used	for Testomat 2000®, Testomat ECO®, EVO and Titromat®	for Testomat® 808	for Testomat® 808	Is used	for Testomat 2000® devices, Titromat	for Testomat 2000® devices, Titromat
Order number	040187	37610	37576	Order number	270305	270310
Description	connection kit with ball valve, pipes, and reducing pieces for the water connection	for the water connection	conversion kit for converting the water connection from Testomat® to BOB Testomat 808®	Description	plug-in card current interface	plug-in card voltage interface
Technical data	<ul style="list-style-type: none"> • 5 m (16.4 ft) pipe, plastic PE 6/4x1, blue • 2 m (6.6 ft) drain hose, d=12 mm i • 1 ball valve, PPSV 011223W • 1 10-6 reducing connector • 1 3/8"-1/2" reducing nipple 	The kit consists of: <ul style="list-style-type: none"> • plastic hose, 6/4 x 1; length 5 m / 16.4 ft • 10 to 6 mm reducer • 3/8"a to 6 mm stopcock 	The kit consists of: <ul style="list-style-type: none"> • plug connection G1/4" DN6 • pipe, PE, D=6; length 5 m / 16.4 ft • screw-in connection G1/4"-6 	Technical data	<ul style="list-style-type: none"> • output current: 0–20mA or 4–20mA • maximum load: 500 Ohm • galvanic isolation 	<ul style="list-style-type: none"> • for connecting a log printer or protocol converter (field bus, Ethernet, etc.)
						
Is used	for Testomat 2000®, Testomat ECO®, EVO and Titromat®	for Testomat® 808		Is used	for Testomat 2000®	for Testomat 2000® devices, Titromat
Order number	040123	100493		Order number	100492	32393
Description	conversion kit for the water inlet for connecting a fabric hose	Data logger with USB connection		Description	Plug-in card with a 100 MBit network connection	Switching power supply unit for the power supply of Testomat® EVO devices
Technical data	<ul style="list-style-type: none"> • 1/4" quick-connect plug • 1/4" quick-connect coupling to hose with d = 6 mm i • lock on the hose side 	<ul style="list-style-type: none"> • The data logger stores the measurement values via the 20mA port at regular intervals. Data can be accessed by the integrated USB port • sufficient storage capacity for 32,768 values. • comes complete with driver and applications • Cannot be used in the Testomat® 808 SIO2! 	Technical data	<ul style="list-style-type: none"> • Web server, FTP server and built-in Flash storage • 8 MB Flash storage for 400,000 measurement values and notifications (around 5 years) • Generation of measurement and alarm data on a monthly basis • Files saved in "CSV" format and can be subsequently processed with Office packages. 	<ul style="list-style-type: none"> • power supply 100-240 VAC / 100-353 VDC 	<ul style="list-style-type: none"> • now available for all Testomat 2000® and Titromat devices (after software update of older units) • including standard SD card up to 2GB • the data are available in CSV format and can be further processed or analyzed easily in a spreadsheet program

Accessories Testomat 2000® / 808		T2000 service case Variant 1		T2000 service case Variant 2		
						
Is used	for Testomat® and Titromat® devices		Is used	for Testomat® and Titromat® devices		
Order number	270337		Order number	270338		
Description	Service case for regular maintenance of aTestomat 2000® device		Description	Service case for regular maintenance of aTestomat 2000® device		
Technical data	<div><div><ul style="list-style-type: none">• 10 20x2 O-rings• 10 10.82x1.78 O-rings• 5 4.47x1.78 O-rings• 5 18x2 EPDM O-rings• 20 24x2 flat gaskets• 5 x filter screen for inlet, 19.5dx25• 5 flow regulator cores• 2 springs for inlet• 10 stoppers for measuring chamber</div><div><ul style="list-style-type: none">• 6 fuses, T 0.08A• 6 fuses, T 0.1 A• 6 fuses, T0.16 A• 6 fuses, T 0.2 A• 6 fuses, T 0.315 A• 6 fuses, T 1.0 A• 6 fuses, M4A• 20 30x3 sight glasses• 3 screw caps with T2000 insert• 4 M3x40 screws</div><div><ul style="list-style-type: none">• 1 suction hose• 1 pressure hose• 6 different pipes• 1 cleaning brush set• 2 push-in angle joints• 2 magnetic stirring bars</div></div>		Technical data	<div><div><ul style="list-style-type: none">• 4 20x2 O-rings• 4 10.82x1.78 O-rings• 2 4.47x1.78 O-rings• 2 18x2 EPDM O-rings• 4 24x2 flat gaskets• 2 x filter screen for inlet, 19.5dx25• 2 flow regulator cores• 2 springs for inlet• 6 stoppers for measuring chamber• 1x push-in connector for the drain hose</div><div><ul style="list-style-type: none">• 2 fuses, T 0.08A• 2 fuses, T 0.1 A• 2 fuses, T0.16 A• 2 fuses, T 0.2 A• 2 fuses, T 0.315 A• 2 fuses, T 1.0 A• 2 fuses, M4A• 4 30x3 sight glasses• 3 screw caps with T2000 insert• 2 M3x40 screws• 2 suction hose• 2 pressure hose</div><div><ul style="list-style-type: none">• 6 different pipes• 1 cleaning brush set• 2 push-in angle joints• 2 magnetic stirring bars• 2x valve set for dosing pump• 1x inlet connection• 1x screw-in connector G1/4"-6• Angled plug-in connector G 1/8"</div></div>		
Repair and service case						
			PMMA sight glasses	Service set	Service set Testomat 2000® Polymer	
Is used for	Testomat® 808	Testomat® 808 SiO2	Is used	for Testomat® 808	for Testomat® 808/808 SiO2	for Testomat 2000® Polymer
Order number	270342	270343	Order number	37653	270351	270353
Description	Case for regular maintenance of a Testomat® 808 / 808 SiO2 and on-site service		Description	PMMA sight glasses	Set for regular maintenance	spare part kit for maintenance of Polymer device and PeriClip pump
Technical data	<div><div><ul style="list-style-type: none">• 8 3.68x1.78 O-rings• 8 1.78x1.78 O-rings• 8 4.5x1.5 O-rings• 8 24x2 flat gaskets• 1 pump head• 4 500ml inserts with screw cap• 1 100ml insert with screw cap• 1 cleaning brush set• 4 angle screw connectors• 6 fuses, T 0.1 A</div><div><ul style="list-style-type: none">• 6 fuses, T 0.2 A• 6 fuses, T 1.0 A• 6 fuses, T4A• 6 30x3 sight glasses• 2 pipes, l = 53 mm• 2 pipes, l = 140 mm• 1 SUB-D null modem cable• 1 USB serial adapter• 2 dosing needles• 4 hose adapters• 2 magnetic stirring bars</div><div><ul style="list-style-type: none">• 8 M3x12 screws• 4 M3x40 screws• 1 magnetic valve• documentation/software (1)<p>Testomat® 808 SiO2 differing:</p><ul style="list-style-type: none">• 1 double pump head• 6 fuses T0.315A• 8 fuses T4A• 2 100ml insert with screw cap</div></div>		Technical data	PMMA sight glasses are used when the silicate content in the measuring water exceeds 15 mg/l and prevent silicates clogging up the sight glasses. The kit consists of: <ul style="list-style-type: none">• 2 24x2 flat gaskets• 2 sight glasses	<ul style="list-style-type: none">• 15 24x2 flat gaskets• 6 sight glasses• 6 3.68x1.78 O-rings• 6 4.5x1.5 O-rings• 6 1.78x1.78 O-rings• 1 pipe, l = 53 mm / 2"• 1 pipe, l = 140 mm / 5.5"• 1 cleaning brush set	<ul style="list-style-type: none">• 1 T2000 gasket kit• 2 30x3 sight glass• 1 flow regulator cores• 3 stoppers for m . chamber• 2 x pump head• 1 filter screen for intake• 3 different pipes• 1 cleaning brush set• 2 x tube connection• 2 x seal for tube connection• 2 x screw cap with insert
No longer included: Optics board + LED holder The optic set can be found on page 38.						

Accessories Testomat 2000® / 808	Service set	1-Year service set	Service set Testomat 2000® PO4
			
Is used	for Testomat 2000®, Testomat ECO®, EVO and Titromat®	for Testomat 2000®, Testomat ECO®, EVO and Titromat®	for Testomat® PO4
Order number	270352	270360	270354
Description	spare part kit for maintenance	small spare part kit for maintenance	spare part kit for main-tenance of PO4 device and PeriClip pump
Technical data	<ul style="list-style-type: none">• 1 T2000 gasket kit• 2 30x3 sight glass• 1 flow regulator cores• 3 stoppers for measuring chamber• 1 valve kit for injection pump• 1 filter screen for intake 19.5 d x 25• 3 different pipes• 1 cleaning brush set	<ul style="list-style-type: none">• 1 T2000 gasket kit• 2 30x3 sight glass• 1 flow regulator cores• 3 stoppers for measuring chamber• 1 valve kit for injection pump• 1 filter screen for intake 19.5 d x 25	<ul style="list-style-type: none">• 1 T2000 gasket kit• 2 30x3 sight glass• 1 flow regulator cores• 3 stoppers for m . chamber• 2 x pump head• 1 filter screen for intake• 3 different pipes• 1 cleaning brush set• 2 x tube connection• 2 x seal for tube connection• 2 x screw cap with insert

Accessories Testomat® / Titromat®	small aerator R	Conversion kit for water connection USA	Conversion kit for 100ml-bottle
			
Is used	for Testomat 2000®/Testomat ECO®, EVO, 808	for Testomat 2000®	for Testomat 2000®, Testomat ECO®, EVO and Titromat®
Order number	130010	40345	040143
Description	small aerator to reduce CO ₂ content	Conversion kit for converting water connections from 6 mm to 1/4"	for using 100 ml / 3.4 oz bottles instead of the 500 ml / 16.9 oz bottles included in the delivery
Technical data	<ul style="list-style-type: none">• max. 12 l/h of water throughput when reducing the free carbon dioxide from max. 200 mg/l to under 20 mg/l• dimensions (W x H x D): 150 x 500 x 100 mm 5.9" x 19.7" x 3.9"• line voltage:230 V/50 Hz• Installation 3 m above device	<ul style="list-style-type: none">• Reducing adaptor from 6 mm to 1/4"	<ul style="list-style-type: none">• 100 ml / 3.4 oz bottle• used for screw cap with suction tube for 100 ml / 3.4 oz bottle• screw cap GL32 hole


Example for assembly of aerator type R

The water intake connection of the small aerator can withstand a maximum of six bar. The water outlet from the small aerator is unpressurised. Therefore, the small aerator must be slotted in ahead of the Testomat device at least 3 m / 9,8 ft (0.3 bar / 4,35 psi) above the Testomat device.

During operation within a pressure range from 0.3 to 1 bar / 4,35 - 14,5 psi, or when supplied via a booster pump, please remove the valve body from the controller and filter housing of the Testomat device (see operating instructions for the Testomat device).

For installation heights lower than 3 m / 9,8 ft, use our booster pump MepuClip® in the Testomat 2000® or Testomat® EVO TH.

Testomat® ECO and Testomat® 808 cannot be fitted with the MepuClip® booster pump.

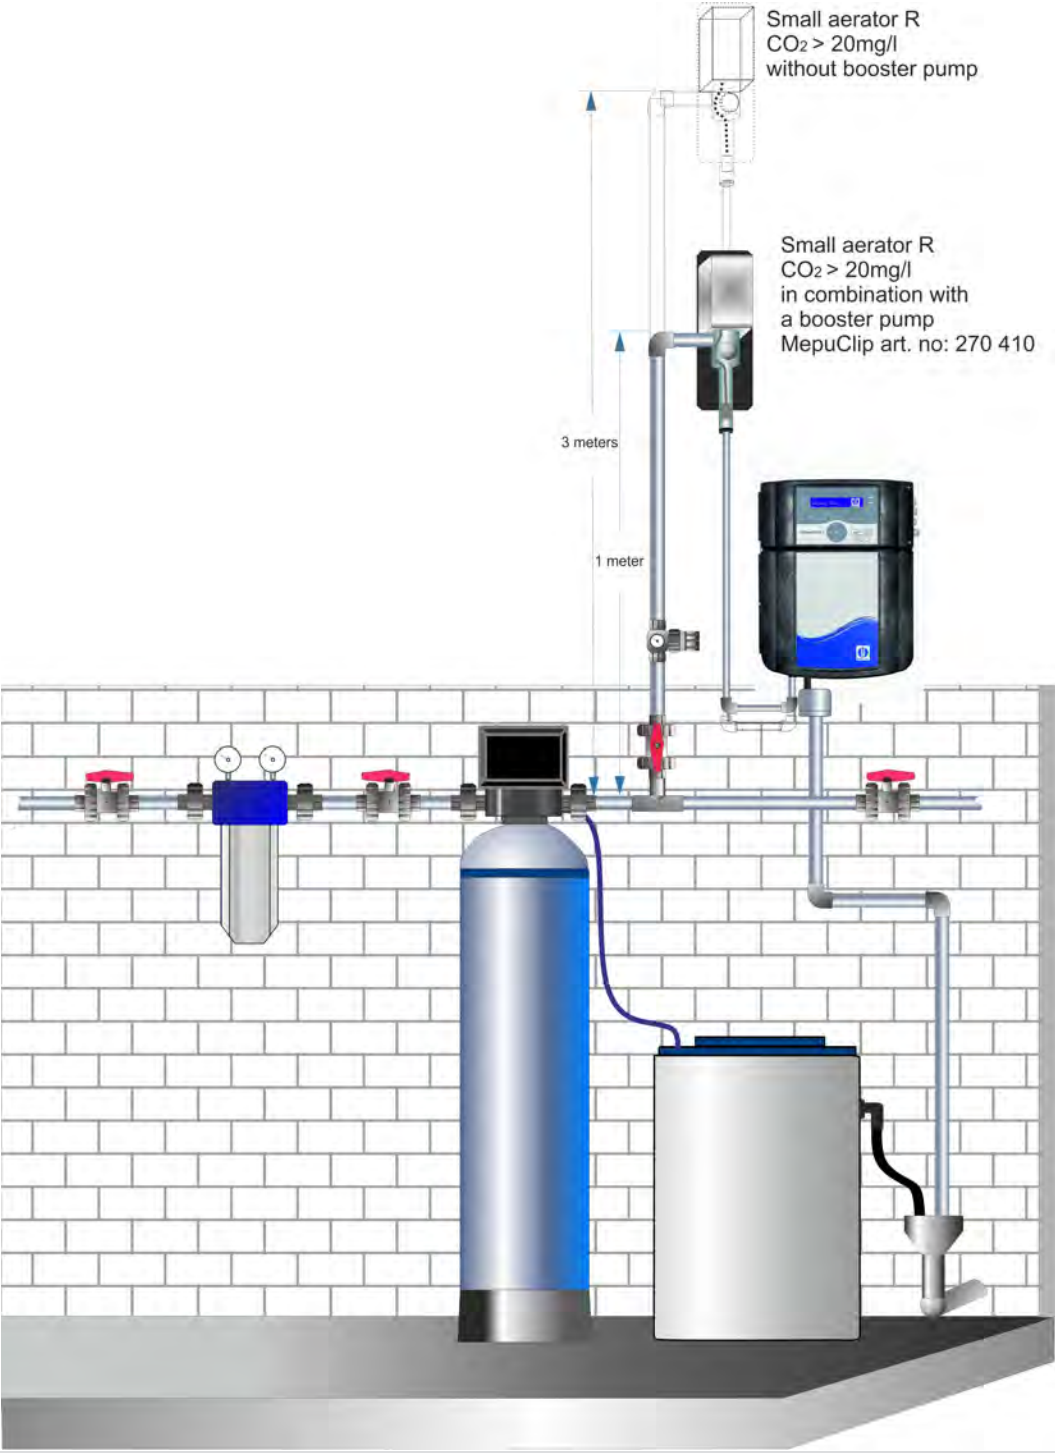

Online analysis instruments	Accessories Testomat 2000® / 808				Spare parts Testomat® / Titromat®			
	Tool kit	Pressure regulator	Suction lance PO4		Pressure regulator	Measuring chamber	Measuring chamber holder	
								
	Is used	for all Testomat and Titromat devices	for Testomat® 808	for Testomat 2000®	Is used	for Testomat 2000®, Testomat ECO®, EVO and Titromat®	for Testomat 2000®, Testomat ECO®, EVO and Titromat®	
	Order number	040138	37602	suction lance (20 l container) 40535 suction lance (5 l container) 40536	Technical data	regulator/filter holder, complete 040125 consists of: regulator/filter holder 040120 regulator stopper T2000, complete 040129 flow regulator core (1–8 bar/14.5-87 psi) 011225 holding pin for regulator stopper 011230 filter screen for inlet 011217 spring for inlet 011218 inlet connector 040121 G ¼" - 6 screw-in connector 040153	measuring chamber, complete 040022 consists of: 30x3 sight glass pane with gasket 040173 30x3 sight glass pane 040170 sight glass holder 040176 M 3x40 screw 033253 TL 800-7-1 040032 tenterhook 011210 plate stopper 24x2 033777 sight glass holder set with 2 screws 040510 (2 sight glass holders and 2 M3x40 screws)	measuring chamber holder, complete (without valves) 040029 and accessories: magnetic rod 040050 plug connection for drain hose 040186 magnet valve, 2/2-ways 040018 pin for chamber holder, 5x60 mm 040181 <i>For further article numbers for DUO , TRIO, and QUAD measuring chamber holders, see pageSeite 36</i>
Description	tool kit for maintenance work on Testomat 2000®	the pressure regulator is used for pressures over 4 bar / 58 psi	long suction lances for large reagent containers					
Technical data	<ul style="list-style-type: none">• 1 Torx TX20 20x100 screwdriver• 1 Torx TX10 10x80 screwdriver• 1 Torx TX8 8x60 screwdriver	<ul style="list-style-type: none">• max. inlet pressure 8 bar/116 psi• ambient temp. 0–50°C / 32-122°F• manometer connection, G1/8 on both sides• non-reversible• Particularly suitable for permeate and deionised water	<ul style="list-style-type: none">• suction lances with different lenghts for 20-litre containers and 5-litre containers					
Accessories Testomat 808/808 SiO2				Measuring chamber with double glazing				
Conversion kit pump head				Measuring chamber T2000 with shortened measurement section				
Conversion kit double pump head				Gear motor				
Candle filter								
								
Is used	for Testomat® 808	for Testomat® 808 SiO2	for Testomat® 808	Is used	for Testomat 2000® and Testomat® 808	for Testomat 2000® Cr VI 0-5ppm, Testomat 2000® PO4	for Testomat® 808 / 808 SiO2	
Order number	040363	040395	candle filter 37583 filter insert 37584	Technical data	The measuring chamber with double glazing can be used in the event of strong temperature differences between air and test water. Problems caused by steaming up in a humid environment are thus prevented in many applications. Measuring chamber for Testomat 2000® 40559 Measuring chamber for Testomat® 808 37863 for both: sight-glass window 30x1,6 37833 sight-glass window holder 37806 seal 37808	Special measuring chamber for Testomat 2000® CrVI 0-5ppm and Testomat 2000® PO4. Cannot be used in other Testomat® devices Order number 40378	gear motor 100494 12 V DC for the dosing pump of Testomat® 808 with installation guide for Testomat 2000® gear motor 39906 12 V DC for the dosing pump PeriClip	
Description	Conversion kit for replacing the old pump head in the new version	Conversion kit for replacing the old double pump head in the new version	candle filter with filter insert for filtering sample water before analysis					
Technical data	<ul style="list-style-type: none">• 1 x pump head Testomat 808• 1 x shaft extension for pump head• 1 x spacer plate for pump head• 1 x screw M3x20• 1 x screw M3x25• 1 x threaded pin M3x3• 1 x 1,5 mm hexagon socket wrench	<ul style="list-style-type: none">• 1 x Doppel-Pumpenkopf Testomat 808 SiO2• 1 x shaft extension for pump head• 1 x spacer plate for pump head• 1 x screw M3x40• 1 x screw M3x50• 1 x threaded pin M3x3• 1 x 1,5 mm hexagon socket wrench	<ul style="list-style-type: none">• max. pressure: 8 bar/116 psi• max. temperature: 50°C/122°F• filter fineness: 100 µm• 1/4" inlet/outlet					
<div>The current testomat® 808 2019 and Testomat® 808 SiO2 2019 devices do not require the conversion kit, as they are factory equipped with the new pump head.</div>								

Measuring chamber holder DUO / TRIO / QUAD
Testomat® / Titromat®

Article no. of the measuring chamber holder							
	DUO 40370	DUO 40371	Trio 40372	Quad 40373	DUO 40375	DUO 40379	DUO 40382
Testomat 2000 Antox	X						
Testomat 2000 Br		X					
Testomat 2000 CLF		X					
Testomat 2000 CLT			X				
Testomat 2000 CLT self clean				X			
Testomat 2000 CLO2		X					
Testomat 2000 CN DUO	X						
Testomat 2000 Cr VI		X					
Testomat 2000 Cr VI 0-5ppm						X	
Testomat 2000 DUO	X						
Testomat 2000 Fe		X					
Testomat 2000 Polymer		X					
Testomat 2000 PO4							X
Testomat 2000 self clean	X						
Testomat 2000 SO3					X		
Testomat 2000 THCl				X			
Titromat M1	X						
Titromat M2	X						
Titromat KH	X						
Titromat TH	X						

Spare parts
Testomat® / Titromat®Bottle connection/
suction device

Device spare parts



Is used

for Testomat 2000®, Testomat
ECO®, EVO TH and Titromat®

for Testomat 2000® /Testomat ECO® and Titromat®

Order number

screw cap with
T2000 insert
for 500 ml bottle 040131

consists of:
GL32 screw cap
— hole 040130

insert for screw cap
with suction pipe 040135

cable feedthrough,
5-7 040190
cable feedthrough,
7-10 040191
T2000 mains switch
complete 040197
cover for mains
switch 040198
ribbon cable,
10-pole, with ferrite
031713
ribbon cable,
26-pole, with ferrite
040096
loom 2V, complete
(for valves) 040060

loom 2P, complete
(for max two dosing
pumps) 040062
loom for main switch
complete 040200
fuse T 0.08 A 031596
fuse T 0.315 A 031585
fuse T 0.1 A 031595
fuse T 0.16 A 031622
fuse T 1.0 A 031592
fuse M4 A 031582
drain funnel T2000 040315

Bottle connection/
suction deviceDevice spare parts
Testomat® EVO

Is used

for Testomat 2000® Polymer/
Testomat 2000® PO4

for Testomat® EVO TH











Order number

screw cap with insert
for 500 ml bottle 37644

screw cap with insert
for 100 ml bottle 37645

Cable ducting
M16x1,5 37734
Nut for cable ducting
M16x1,5 37735
Blanking plug for
cable ducting 37736
ribbon cable, 10-pole,
with ferrite 31713
loom 2V, complete
(for valves) 40060
loom 2P, complete
(for max two dosing
pumps) 40062

fuse
GS-M 5x20E 4A MT 31582
fuse T0,315 A 31585
fuse T0,16 A 31622
fuse T1,6 A 12140
fuse T2,0 A 31655
standard SD card
2 GB 37320
Lithium backup battery
CR2032 31999
drain funnel 32187

Spare parts Testomat® 808/808 SiO2		Devices spare parts Testomat® 808 SiO2		Set optical board + LED socket		Measuring chamber Testomat® 808 SiO2		Dosing pumps Testomat® / Titromat®		DOSIClip®		MEPUClip®		FLOWClip®	
															
Is used		for Testomat® 808 SiO2		for Testomat® 808 / 808 SiO2		for Testomat® 808 / 808 SiO2		Is used as		dosing pump for Testomat devices		booster pump for Testomat 2000®/Titromat®		dosing pump for Testomat 2000® self clean	
Order number		magnet valve	37570	Testomat® 808 - 2019: Full set with optics board and LED holder, 40393 synchronized by the factory		24x2 flat gasket	33777	Order number		270470		270410		270440	
		double pump head	37859	Testomat® 808 SiO2 - 2019 Full set with optics board and LED holder, 40394 synchronized by the factory		30x3 sight glass pane sight glass holde	40170 40176	Description		electromagnetically driven piston dosing pump for dosing aqueous media that are free of suspended matter		installation of the membrane pump is necessary for water inlet pressure under 0.3 bar		membrane pump for dosing cleaning agent into the measuring chamber also possible for other reagents	
		fuse, T1,0A	31592	Testomat® 808 SiO2 - 2019 Full set with optics board and LED holder, 40394 synchronized by the factory		M3x40 screw, A2, DIN 965	33253	Technical data		<ul style="list-style-type: none"> • pump volume: 30 µl/stroke • max. suction height: approx. 0.5 m with water and 0.8 mm hose ID • max. pump pressure: approx. 1 bar /4.5 psi with water and 0.8 mm hose ID (max. 0.5 m length) • ambient temperature: 10–45°C / 50–113°F • mounting: on 35 mm / 1.4" DIN top-hat rail 		<ul style="list-style-type: none"> • Flow rate at atmospheric pressure : 0.6 l/min • Maximum suction head: 3m H₂O self-priming • ambient temperature: 10–45°C / 50–113°F • mounting: on 35 mm / 1.4" DIN top-hat rail 		<ul style="list-style-type: none"> • Flow rate at atmospheric pressure : 0.1 l/min • Maximum suction head: 3m H₂O self-priming • ambient temperature: 10–45°C / 50–113°F • mounting: on 35 mm / 1.4" DIN top-hat rail 	
		fuse, T0,315A	31585	<u>For older instruments:</u> Testomat® 808: Full set with optics board and LED holder, 40364 synchronized by the factory		T808 SiO2 measuring chamber, complete (1–4 bar/14.5–58 psi)	37784								
		fuse, T0,2A	31584			T808 SiO2 measuring chamber, complete (0.3–1 bar/4.4–14.5 psi)	37785								
		fuse, T0,1A	31595	Testomat® 808 SiO2 Full set with optics board and LED holder, 40365 synchronized by the factory		magnetic rod	40050								
		fuse,GS-T, 5x20, T A4	31666			G1/8"-6 screw-in angle joint	40157								
		cable ducting M16 x 1,5	37734												
		Nut for cable ducting M16 x 1.5	37735												
		Blanking plug for cable ducting	37736												
Devices spare parts Testomat® 808		Measuring chamber		Bottle connection/ suction device		PERIClip®									
															
Is used		for Testomat® 808		for Testomat® 808		for Testomat® 808 / 808 SiO2		Is used as		dosing pump for Testomat 2000® Polymer / PO4					
Order number		magnet valve	37570	24x2 flat gasket	33777	Testomat® 808: bottle insert with screw cap and suction tube,		Order number		270430					
		pump head	37562	30x3 sight glass pane	40170	tube connection ø 2.4 mm		Description		hose pump for aqueous media					
		fuse, T1.0A	31592	sight glass holder	40176	500 ml bottle	37579	Technical data		<ul style="list-style-type: none"> • pump volume: 400–500 µl/min • ambient temperature: 10–45°C / 50–113°F • mounting: on 35 mm / 1.4" DIN top-hat rail • dimensions: 75 x 45 x 110 mm (HxWxD) 3" x 1,8" x 4.3" 					
		fuse, T0.8A	31593	M3x40 screw, A2, DIN 965	33253	100 ml bottle	37580								
		fuse, T0.2A	31594	T808 measuring chamber, complete (1–4 bar/14.5–58 psi)	37615	hose adapter ø 2.4 mm	37538								
		fuse, T0.1A	31595	T808 measuring chamber, complete (0.3–1 bar/4.4–14.5 psi)	37616	Testomat® 808 SiO2: bottle insert with screw cap and suction tube,									
		fuse, GS-T, 5x20, T A4	31666	magnetic rod,	40050	tube connection ø 3.5 mm									
		cable ducting M16 x 1,5	37734	processed	40157	500 ml bottle	37644								
		Nut for cable ducting M16 x 1.5	37735	G1/8"-6 screw-in angle joint	40157	100 ml bottle	37645								
		Blanking plug for cable ducting	37736			hose adapter ø 3.5 mm	37643								

Spare parts for the Testomat® BOB can only be supplied to a limited extent. Please contact your distributor if you need spare parts.

Indicators/reagents Together for the Heyl Well (Our second fundraising campaign with the Neven Subotic Foundation)

We at Gebrüder Heyl Analysentechnik GmbH & Co. KG take our social commitment very seriously, with a particular focus on supporting young people. But we want to do even more.

We firmly believe that our fundraising activities with the Neven Subotic Foundation make a positive contribution to people who, due to various factors, do not have it as easy as we do.

This is why we donate a small amount from every 500 ml bottle of Testomat® hardness indicator sold to provide people with clean drinking water. After all,

water is our element and we want to contribute to ensuring that everybody has access to clean drinking water.

Our 2019 fundraising campaign for the Neven Subotic Foundation was successfully completed in early 2020. 10,086.60 euros were collected for the construction of the well.

Find out more about our fundraising campaign at: www.heylandalysis.de or scan the QR code.



Testomat 2000® indicators (500 ml bottle)

Indicator type	Unit °dH (resolution)	°f (resolution)	ppm CaCO ₃ (resolution)	mmol/l (resolution)	Order number
TH 2005	0,05-0,50 (0,01)	0,09-0,89 (0,02)	0,89-8,93 (0,2)	0,01-0,09 (0,01)	152005
TH 2025	0,25-2,50 (0,05)	0,45-4,48 (0,10)	4,48-44,8 (0,9)	0,04-0,45 (0,01)	152025
TH 2100	1,00-10,00 (0,20)	1,79-17,9 (0,40)	17,9-179 (3,8)	0,18-1,79 (0,04)	152100
TH 2250	2,50-25,00 (0,50)	4,48-44,8 (1,00)	44,8-448 (10)	0,45-4,48 (0,10)	152250
TC 2050	0,50-5,00 (0,50)	0,90-8,96 (0,90)	8,9-89,5 (8,9)	0,18-1,79 (0,18)	153050
TC 2100	1,00-20,00 (1,00)	1,79-35,8 (1,79)	18-358 (18)	0,36-7,14 (0,36)	153100
TM 2005				0,05-0,50 (0,05)	154005
TP 2010				0,1-1,5 (0,10)	155010
TP 2100				1-15,0 (1,00)	155100

Testomat 2000® indicators (100 ml bottle)

Indicator type	Unit °dH (resolution)	°f (resolution)	ppm CaCO ₃ (resolution)	mmol/l (resolution)	Order number
TH 2005 (2 x 100 ml)	0,05-0,50 (0,01)	0,09-0,89 (0,02)	0,89-8,93 (0,2)	0,01-0,09 (0,01)	151005
TH 2025	0,25-2,50 (0,05)	0,45-4,48 (0,10)	4,48-44,8 (0,9)	0,04-0,45 (0,01)	151025
TH 2100	1,00-10,00 (0,20)	1,79-17,9 (0,40)	17,9-179 (3,8)	0,18-1,79 (0,04)	151100
TH 2250	2,50-25,00 (0,50)	4,48-44,8 (1,00)	44,8-448 (10)	0,45-4,48 (0,10)	152250

Please note that a different bottle insert is required for the 100 ml from the insert included in the delivery.
(T2000 conversion kit, art. no. 40143)

Testomat 2000® special solutions

Reagent type	Device	Order number
self clean cleaning solution (500 ml)	T 2000 self clean	151105
Antox solution (2 x 100 ml) for eliminating oxidant-related disruptions	T 2000 Antox	151107

Testomat 2000® reagents (500 ml bottle)



Reagent type	Parameters	for device	Measuring range [mg/l]	Order number
CL 2250 A	total chlorine + free chlorine	CL T + CL F	0-2,5	156230
CL 2250 B	total chlorine + free chlorine	CL T + CL F	0-2,5	156231
CL 2250 C	total chlorine	CL T	0-2,5	156232
chlorine reagent set T*	total chlorine + free chlorine	CL T + CL F	0-2,5	156235
chlorine reagent set T 50%*	total chlorine + free chlorine	CL T + CL F	0-2,5	156237
chlorine reagent set F*	free chlorine	CL F	0-2,5	156233
CLO2 reagent set A u. B*	chlorine dioxide	ClO ₂	0-4,7	156265
CrVI 2100 A	chromate CrO ₄ ²⁻ or chromium VI	CrVI	0-5,0 0-1,0	156220
CrVI 2100 B	chromate CrO ₄ ²⁻ or chromium VI	CrVI	0-5,0 0-1,0	156221
FE 2005 A	iron dissolved (I I) u. (I I I)	Fe	0-1,0	156250
FE 2005 B	iron dissolved (I I) u. (I I I)	Fe	0-1,0	156251
Sulfite reagent A	sulfite	SO ₃ ²⁻	0-50	156240
Sulfite reagent B	sulfite	SO ₃ ²⁻	0-50	156241
Brom reagent set*	bromine	Br	0-5,6	156295
Polymer reagent A	polymer	Polymer	0-50	156271
Polymer reagent B	polymer	Polymer	0-50	156272
PO4 reagent set 2100	phosphate	PO ₄	0-10	156264
PO4 reagent 2100 A (20 litres)	phosphate	PO ₄	0-10	156281
PO4 reagent 2100 B (5 litres)	phosphate	PO ₄	0-10	156282

*The reagent sets are designed for the uniform consumption of reagents; the capacities of the individual reagent bottles are therefore not identical.

new

Titromat® reagents (500 ml bottle)








Reagent type	for	Parameters	Measuring range	Resolution	Order number
TH 2500 reagent A	TH	Water hardness	2,5-50 °dH	2,5 °dH	155160
TH 2500 reagent B	TH	Water hardness	2,5-50 °dH	2,5 °dH	155161
TC 2010 reagent A	M1	Carbonate hardness	0,05-1 °dH	0,025 °dH	155172
TC 2010 reagent B	M1	Carbonate hardness	0,05-1 °dH	0,025 °dH	155173
TC 2020 reagent A	M2	Carbonate hardness	0,05-2 °dH	0,05 °dH	155170
TC 2020 reagent B	M2	Carbonate hardness	0,05-2 °dH	0,05 °dH	155171
TC 2060 reagent A	KH	Carbonate hardness	2-60 °dH	2 °dH	155176
TC 2060 reagent B	KH	Carbonate hardness	2-60 °dH	2 °dH	155177
TC 2150 reagent A	KH	Carbonate hardness	5-150 °dH	5 °dH	155178
TC 2150 reagent B	KH	Carbonate hardness	5-150 °dH	5 °dH	155179






	Type	Limit value	Bottle	Order number	
808/F-BOB	300	0,02 °dH residual hardness	100 ml	140001	
	300S	0,05 °dH residual hardness	100 ml	140002	
	301	0,1 °dH residual hardness	100 ml	140003	
	302	0,2 °dH residual hardness	100 ml	140004	
	303	0,3 °dH residual hardness	100 ml	140005	
	305	0,5 °dH residual hardness	100 ml	140006	
	310	1 °dH residual hardness	100 ml	140007	
	320	2 °dH residual hardness	100 ml	140008	
	330	3 °dH residual hardness	100 ml	140009	
	350	5 °dH residual hardness	100 ml	140010	
C-BOB	C 5	0,5 °dH carbonate hardness	100 ml	140020	
	C 10	1 °dH carbonate hardness	100 ml	140021	
	C 15	1,5 °dH carbonate hardness	100 ml	140022	
	C 20	2 °dH carbonate hardness	100 ml	140023	
	C 30	3 °dH carbonate hardness	100 ml	140024	
	C 40	4 °dH carbonate hardness	100 ml	140025	
M-BOB	M 1	0,1 mmol/l minus m-value	100 ml	140040	
	M 3	0,3 mmol/l minus m-value	100 ml	140041	
	M 5	0,5 mmol/l minus m-value	100 ml	140042	
808/F-BOB	300	0,02 °dH residual hardness	500 ml	141001	
	300 S	0,05 °dH residual hardness	500 ml	141002	
	301	0,1 °dH residual hardness	500 ml	141003	
	302	0,2 °dH residual hardness	500 ml	141004	
	303	0,3 °dH residual hardness	500 ml	141005	
	305	0,5 °dH residual hardness	500 ml	141006	
	310	1 °dH residual hardness	500 ml	141007	
	320	2 °dH residual hardness	500 ml	141008	
	330	3 °dH residual hardness	500 ml	141009	
	350	5 °dH residual hardness	500 ml	141010	
C-BOB	C 5	0,5 °dH carbonate hardness	500 ml	141020	
	C 10	1 °dH carbonate hardness	500 ml	141021	
	C 15	1,5 °dH carbonate hardness	500 ml	141022	
	C 20	2 °dH carbonate hardness	500 ml	141023	
	C 30	3 °dH carbonate hardness	500 ml	141024	
	C 40	4 °dH carbonate hardness	500 ml	141025	
M-BOB	M 1	0,1 mmol/l minus m-value	500 ml	141040	
	M 3	0,3 mmol/l minus m-value	500 ml	141041	
	M 5	0,5 mmol/l minus m-value	500 ml	141042	
808 SiO2	A	0,3 - 1,2 ppm SiO2	500 ml	141808	
	B	0,3 - 1,2 ppm SiO2	500 ml	141809	
	reagent set A+B	0,3 - 1,2 ppm SiO2	100 ml	141808	



Description		Controller for water softening plants			Controller for water softening plants			
Pluspunkte		<ul style="list-style-type: none">• variable multi-purpose housing for control panel installation and wall installation• multilingual menu navigation• large blue LCD with 2 lines x 16 characters and backlight• error messages and operating mode displays are displayed alternately and stored in the error history• real-time clock• five potential-free relay outputs for two filters, service valves and error message, synchronizing contact• 12 V power supply for water turbine• 5 inputs: water flow meter, regeneration start/regeneration stop, salt and brine monitoring, and additional external program start• connection to various valves such as Autotrol, WWWS, Fleck, Siata			like Softmaster® MMP1, but with the following inputs and outputs: <ul style="list-style-type: none">• eight potential-free relay outputs for two filters, service valves, two additional programs, and error message, synchronizing contact• output for metering pulse• 12 V power supply for water turbine• inputs for 2 water flow meters• 8 inputs: regenerationsstart/ regenerations-stop, brine level – empty/full, synchronous messages from valves, and error messages from Testomat instruments			
Protection type/class		IP65 / I			IP65 / I			
Mains connection		230–240V, 115V, 24V +/-10% 50–60Hz			230–240V, 115V, 24V +/-10% 50–60Hz			
Power consumption		max. 9 VA			max. 9 VA			
Dimensions		approx. 270 x 295 x 130 mm 10.6“ x 11.6“ x 5.1“ (W x H x D) 262 x 146 mm / 10.3“ x 5.7“, +1 mm control panel cut-out approx. 90 mm / 3.5“ installation depth 270 x 155 mm / 10.6“ x 6.1“ front frame dimensions			approx. 270 x 295 x 130 mm 10.6“ x 11.6“ x 5.1“ (W x H x D) 262 x 146 mm / 10.3“ x 5.7“, +1 mm control panel cut-out approx. 90 mm / 3.5“ installation depth 270 x 155 mm / 10.6“ x 6.1“ front frame dimensions			
Weight		approx. 1.3 kg / 2.9 lbs			approx. 1.3 kg / 2.9 lbs			
Measuring range		—			—			
Application		<ul style="list-style-type: none">• fully automatic regeneration of water softening systems• suitable for central control valves or pilot distributors, controlled via electrical toggle or pulse switch for single and double softening systems• quantity, time, or quality controlled activation of regeneration			<ul style="list-style-type: none">• like Softmaster MMP1 in addition: <ul style="list-style-type: none">• parallel and serial connection			
Menu language		D, GB, F, I, NL, PL			D, GB, F, I, NL, PL			
Order numbers		<div><div>24V</div><div>115 V</div><div>230 V</div></div>			<div><div>24V</div><div>115 V</div><div>230 V</div><div>230V/24V</div></div>			
attachable with RS232 installable with RS232		610100			620000			
		610101			620001			
		610102			620002			
		610110			620010			
		610111			620011			
		610112			620012			
		620200			620210			
		620201			620211			
		620202			620212			
		620203			—			
		—			—			

Product	Softmaster® MMP compact			Softmaster® ROE1			Softmaster® ROE2				Softmaster® ROE2/S5			Softmaster® ROE3			
																	
Description	Controller for water softening systems			Controller for reverse osmosis systems			Controller for reverse osmosis systems				Controller for reverse osmosis systems with programmable controller for water deficiency			Controller for reverse osmosis systems			
Advantages	<ul style="list-style-type: none">• multilingual menu navigation• large LCD with 2 lines x 16 characters and backlight• error messages and operating mode displays are displayed alternately and stored in the error history• real-time clock• 4 non-potential-free relay outputs: 2 filters, service valves, and synchronous contact• one potential-free relay output for error message/additional program• 12 V power supply for water turbine• 5 inputs: water flow meter, regeneration start/regeneration stop, brine monitoring – empty and additional external program start• connection to various valves such as Autotrol, WWWS, Fleck, Siata			<ul style="list-style-type: none">• variable multi-purpose body for control panel and wall installation• multilingual menu navigation• large blue LCD with 2 lines x 16 characters and backlight• error messages and operating mode displays are displayed alternately and stored in the error history• real-time clock• connection for conductivity probe with temperature sensor for permeate In addition, the following inputs and outputs: <ul style="list-style-type: none">• 5 potential-free relay outputs: pump, inlet valve, flushing valve, dosing, and error message output• 5 inputs: water deficiency message, overpressure message motor protection, storage tank FULL /EMPTY, system stop• 12 V-power supply			like Softmaster® ROE1, but with the following inputs and outputs: <ul style="list-style-type: none">• eight potential-free relay outputs for two pumps, programmable function output, inlet valve, outlet valve, flushing valve, by-pass valve, and error message output• output for metering pulse• eight inputs for concentrate monitoring, emergency operation (bypass) and external motor protection switch, water deficiency message, overpressure message, storage tank FULL /EMPTY, system stop• two inputs for water flow meter• 12 V power supply for water turbine• 4–20 mA input for a pressure transducer				like Softmaster® ROE2, but in addition: <ul style="list-style-type: none">• programmable function for control for water deficiency. You determine how often and after how much time the system should be turned back on.• interval for restart after water deficiency message between 1 and 99 minutes can be selected			like Softmaster® ROE1, but with the following inputs and outputs: <ul style="list-style-type: none">• eight potential-free relay outputs for two filters, service valves, two add-on programs, and error message, synchronizing contact• output for metering pulse• 12 V power supply for water turbine• inputs for 2 water flow meters• 8 inputs: water deficiency message, concentrate monitoring, overpressure message, storage tank FULL / EMPTY, external motor protection switch, system stop			
Protection type/class	IP65 / I			IP65 / I			IP65 / I				IP65 / I			IP65 / I			
Mains connection	230–240V, 115V, 24V +/-10% 50–60Hz			230–240V, 115V, 24V +/-10% 50–60Hz			230–240V, 115V, 24V +/-10% 50–60Hz				230–240V, 115V, 24V +/-10% 50–60Hz			230–240V, 115V, 24V +/-10% 50–60Hz			
Power consumption	max. 9 VA			max. 9 VA			max. 9 VA				max. 9 VA			max. 9 VA			
Dimensions	approx. 257 x 214 x 135 mm 10.1" x 8.4" x 5.3" (W x H x D)			approx. 270 x 295 x 130 mm 10.6" x 11.6" x 5.1"(W x H x D) 262 x 146 mm / 10.3" x 5.7", +1 mm control panel cut-out approx. 90 mm / 3.5" installation depth 270 x 155 mm / 10.6" x 6.1" front frame dimensions			approx. 270 x 295 x 130 mm 10.6" x 11.6" x 5.1"(W x H x D) 262 x 146 mm / 10.3" x 5.7", +1 mm control panel cut-out approx. 90 mm / 3.5" installation depth 270 x 155 mm / 10.6" x 6.1" front frame dimensions				approx. 270 x 295 x 130 mm 10.6" x 11.6" x 5.1"(W x H x D) 262 x 146 mm / 10.3" x 5.7", +1 mm control panel cut-out approx. 90 mm / 3.5" installation depth 270 x 155 mm / 10.6" x 6.1" front frame dimensions			approx. 270 x 295 x 130 mm 10.6" x 11.6" x 5.1"(W x H x D) 262 x 146 mm / 10.3" x 5.7", +1 mm control panel cut-out approx. 90 mm / 3.5" installation depth 270 x 155 mm / 10.6" x 6.1" front frame dimensions			
Weight	approx. 1.6 kg / 3.5 lbs			approx. 2.3 kg / 5 lbs			approx. 2.3 kg / 5 lbs				approx. 2.3 kg / 5 lbs			approx. 2.3 kg / 5 lbs			
Measuring range	—			0.1–50,000 µS/cm 0.01–5.0 cm ⁻¹ cell constant			0,1-50.000 µS/cm 0,01-5,0 cm ⁻¹ cell constant				0,1-50.000 µS/cm 0,01-5,0 cm ⁻¹ cell constant			0,1-50.000 µS/cm 0,01-5,0 cm ⁻¹ cell constant			
Application	<ul style="list-style-type: none">• fully automatic regeneration of water softening plants• suitable for central control valves or pilot distributors, controlled via electrical toggle or pulse switch for single and double softening systems• quantity, time, or quality controlled activation of regeneration			<ul style="list-style-type: none">• reverse osmosis plants with 1 conductivity measurement Application example on page 5			<ul style="list-style-type: none">• reverse osmosis plants with 1 conductivity measurement				<ul style="list-style-type: none">• reverse osmosis plants with 1 conductivity measurement			<ul style="list-style-type: none">• reverse osmosis plants with second conductivity measurement for controlling an EDI module			
Menu language	D, GB, F, I, NL, PL			D, GB, F, I, NL, PL			D, GB, F, I, NL, PL				D, GB, F, I, NL, PL			D, GB, F, I, NL, PL			
Order numbers	attachable with RS232 installable with RS232	24V	115 V	230 V	24V	115 V	230 V	24V	115 V	230 V	230V/24 V	24V	115 V	230 V	24V	115 V	230 V
		610225	610226	610227	upon request	upon request	601102	request	request	request	request	—	—	upon request	upon request	upon request	upon request
					—	—	—	request	request	request	request	—	—	—	upon request	upon request	603202
					upon request	upon request	601112	602010	request	602012	—	—	—	upon request	upon request	upon request	603012
					—	—	—	602210	602211	602212	—	—	—	—	—	upon request	upon request

Product	Softmaster® ROE compact			MultiControl CT	Desalination device																																																																	
																																																																						
Description	Controller for reverse osmosis systems			Controller for cooling systems																																																																		
Advantages	<ul style="list-style-type: none">• multilingual menu navigation• large LCD with 2 lines x 16 characters and backlight• real-time clock• three potential-free relay outputs for pump, inlet valve and flushing valve• two potential-free relay outputs for measuring and error message output• 5 inputs: water deficiency message, concentrate monitoring, overpressure message, storage tank FULL / EMPTY, external motor protection switch, system stop			<ul style="list-style-type: none">• LCD graphic display with background lighting• multi-language menu (DE, GB, FR, NL, PL, ES, TR)• relay outputs for attaching up to three pumps (dosing pump, circulation pump)• alarm output• inputs for external engine protection, water flow meter, biocide monitoring• two slots for conductivity probes and interface card• Error indicator on the display• error history for 20 notifications measurements and error notifications can be stored on SD card• ring buffer with 50 storage spaces• calibrating function for the conductivity probe• biocide metering dependent on time• 1 output for desalting valve (engine or magnet valve)																																																																		
Protection type/class	IP54 / I			IP54 / I																																																																		
Mains connection	230–240V, 115V, 24V +/-10% 50–60Hz			230VAC, 24VAC +/-10% 50–60Hz or 100-240VAC, 100-353 VDC (wide-range power supply)																																																																		
Power consumption	max. 9 VA			max. 25 VA (without external load)																																																																		
Dimensions	approx. 357 x 214 x 135 mm 14" x 8.4" x 5.3" (W x H x D)			approx. 229 x 205 x 117 mm 8" x 9" x 4.6" (W x H x D)																																																																		
Weight	approx. 1.6 kg / 3.5 lbs			approx. 1,5 kg / 3.3 lbs																																																																		
Measuring range	0,1-50.000 µS/cm 0,01-5,0 cm ⁻¹ cell constant			0-199,9 µS/cm bis 0-199,9 mS/cm (depending on cell constants)																																																																		
Application	• reverse osmosis plants with 1 conductivity measurement			• Control of desalting and metering in cooling circuits Application example on page 7																																																																		
Menu language	D, GB, F, I, NL, PL			D, GB, F, NL, PL, ES, TR																																																																		
Order numbers	<table><tr><td>24V</td><td>115 V</td><td>230 V</td></tr><tr><td>601225</td><td>601226</td><td>601227</td></tr></table>			24V	115 V	230 V	601225	601226	601227	Order numbers for MultiControl CT on page 52.																																																												
	24V	115 V	230 V																																																																			
601225	601226	601227																																																																				
attachable																																																																						
Is used	for process water circuits and cooling circuits																																																																					
Technical data	<table><tr><td>Dimensions</td><td colspan="4">450 x 700 x 300 mm (W x H x D)</td></tr><tr><td>Mounting dimensions</td><td colspan="4">629 x 407 mm</td></tr><tr><td>Piping material</td><td colspan="4">PVC-U</td></tr><tr><td>Inlet</td><td colspan="4">DN 32; inner diameter approx. 25 mm</td></tr><tr><td>Outlet</td><td colspan="4">DN 32; inner diameter approx. 25 mm</td></tr><tr><td>Outlet duct</td><td colspan="4">DN 32; inner diameter approx. 25 mm</td></tr><tr><td>Max. water pressure</td><td colspan="4">4 bar</td></tr><tr><td>Power supply</td><td colspan="4">230 VAC</td></tr><tr><td>Power consumption</td><td colspan="4">6 VA</td></tr><tr><td>Ambient temperature</td><td colspan="4">5 – 40°C</td></tr><tr><td>Water temperature</td><td colspan="4">5 – 40°C</td></tr><tr><td>Weight</td><td colspan="4">8.2 kg</td></tr><tr><td>Protection type</td><td colspan="4">IP54</td></tr></table>					Dimensions	450 x 700 x 300 mm (W x H x D)				Mounting dimensions	629 x 407 mm				Piping material	PVC-U				Inlet	DN 32; inner diameter approx. 25 mm				Outlet	DN 32; inner diameter approx. 25 mm				Outlet duct	DN 32; inner diameter approx. 25 mm				Max. water pressure	4 bar				Power supply	230 VAC				Power consumption	6 VA				Ambient temperature	5 – 40°C				Water temperature	5 – 40°C				Weight	8.2 kg				Protection type	IP54			
Dimensions	450 x 700 x 300 mm (W x H x D)																																																																					
Mounting dimensions	629 x 407 mm																																																																					
Piping material	PVC-U																																																																					
Inlet	DN 32; inner diameter approx. 25 mm																																																																					
Outlet	DN 32; inner diameter approx. 25 mm																																																																					
Outlet duct	DN 32; inner diameter approx. 25 mm																																																																					
Max. water pressure	4 bar																																																																					
Power supply	230 VAC																																																																					
Power consumption	6 VA																																																																					
Ambient temperature	5 – 40°C																																																																					
Water temperature	5 – 40°C																																																																					
Weight	8.2 kg																																																																					
Protection type	IP54																																																																					
Specific data	<table><tr><td colspan="2"><u>Type I-S-P:</u></td><td colspan="2"><u>Type I-J-F:</u></td></tr><tr><td>Control system</td><td>MultiControl CT</td><td>Control system</td><td>MultiControl CT</td></tr><tr><td>Conductivity measurement</td><td>Inductive probe</td><td>Conductivity measurement</td><td>Inductive probe</td></tr><tr><td>Measurement range</td><td>20 mS/cm</td><td>Measurement range</td><td>5 mS/cm</td></tr><tr><td>RS232 output</td><td></td><td>Change in the measuring range possible</td><td></td></tr><tr><td>Power consumption</td><td>20 V - 50 mA</td><td>Current output</td><td>2 x 0 - 20 mA</td></tr><tr><td>Temperature sensor</td><td>0 - 100°C</td><td>Power consumption</td><td><2,6 W</td></tr><tr><td>Flow monitor</td><td>Type VH3</td><td>Flow monitor</td><td>Type VH3</td></tr><tr><td>Nominal pressure</td><td>PN 25</td><td>Nominal pressure</td><td>PN 25</td></tr><tr><td>Max. flow rate</td><td>100 l/min</td><td>Max. flow rate</td><td>100 l/min</td></tr><tr><td>Switching range</td><td>10.4...14.8 l/min</td><td>Switching range</td><td>10.4...14.8 l/min</td></tr><tr><td>Motor valve</td><td>230 VAC 50-60 Hz</td><td>Motor valve</td><td>230 V valve</td></tr><tr><td>Motor power</td><td>4 W</td><td>Motor power</td><td>10 W</td></tr></table>					<u>Type I-S-P:</u>		<u>Type I-J-F:</u>		Control system	MultiControl CT	Control system	MultiControl CT	Conductivity measurement	Inductive probe	Conductivity measurement	Inductive probe	Measurement range	20 mS/cm	Measurement range	5 mS/cm	RS232 output		Change in the measuring range possible		Power consumption	20 V - 50 mA	Current output	2 x 0 - 20 mA	Temperature sensor	0 - 100°C	Power consumption	<2,6 W	Flow monitor	Type VH3	Flow monitor	Type VH3	Nominal pressure	PN 25	Nominal pressure	PN 25	Max. flow rate	100 l/min	Max. flow rate	100 l/min	Switching range	10.4...14.8 l/min	Switching range	10.4...14.8 l/min	Motor valve	230 VAC 50-60 Hz	Motor valve	230 V valve	Motor power	4 W	Motor power	10 W													
<u>Type I-S-P:</u>		<u>Type I-J-F:</u>																																																																				
Control system	MultiControl CT	Control system	MultiControl CT																																																																			
Conductivity measurement	Inductive probe	Conductivity measurement	Inductive probe																																																																			
Measurement range	20 mS/cm	Measurement range	5 mS/cm																																																																			
RS232 output		Change in the measuring range possible																																																																				
Power consumption	20 V - 50 mA	Current output	2 x 0 - 20 mA																																																																			
Temperature sensor	0 - 100°C	Power consumption	<2,6 W																																																																			
Flow monitor	Type VH3	Flow monitor	Type VH3																																																																			
Nominal pressure	PN 25	Nominal pressure	PN 25																																																																			
Max. flow rate	100 l/min	Max. flow rate	100 l/min																																																																			
Switching range	10.4...14.8 l/min	Switching range	10.4...14.8 l/min																																																																			
Motor valve	230 VAC 50-60 Hz	Motor valve	230 V valve																																																																			
Motor power	4 W	Motor power	10 W																																																																			
Order number	<table><tr><td>Type I-J-F for process water circuits</td><td>310140</td></tr><tr><td>Type I-S-P for cooling circuits</td><td>310160</td></tr></table>					Type I-J-F for process water circuits	310140	Type I-S-P for cooling circuits	310160																																																													
Type I-J-F for process water circuits	310140																																																																					
Type I-S-P for cooling circuits	310160																																																																					
	Application example on page 8																																																																					






Order numbers MultiControl				
Device type	Voltage	plug-in card	Parameters	Order number
MultiControl CT	24 V	EC inductive/pH	Conductivity (inductive) pH value	341010
MultiControl CT	100-240VAC	EC inductive/pH	Conductivity (inductive) pH value	341020
MultiControl CT	230 V	EC inductive/pH	Conductivity (inductive) pH value	341030
MultiControl CT	24 V	BKEX probe*	Conductivity (inductive)	341040
MultiControl CT	100-240VAC	BKEX probe*	Conductivity (inductive)	341050
MultiControl CT	230 V	BKEX probe*	Conductivity (inductive)	341060
MultiControl CT	24 V	EC/pH (conductive)	Conductivity (conductive), pH value	341070
MultiControl CT	100-240VAC	EC/pH (conductive)	Conductivity (conductive), pH value	341080
MultiControl CT	230 V	EC/pH (conductive)	Conductivity (conductive), pH value	341090





* Please note that the plug-in card for the BKEX probe cannot be combined with other measuring cards.





We assembled and preconfigured the MultiControl device in the device variants listed above.
Your service partner will gladly advise you on the selection of the suitable variant for you.





The suitable probes and accessories for the MultiControl device can be found on the following pages.







Inductive probes	Page 49
pH probes	Page 50
Conductive probes	Page 51



Inductive conductivity probes		Inductive probe BKEX	Plug-in card for BKEX probe	ADI plug-in card
				
Is used		for MultiControl	for MultiControl	for MultiControl
Order number		37851	37347	37342
Technical data		<ul style="list-style-type: none"> Inductive probe for conductivity measurement 20 mS/cm A plug-in card (Item no. 37347) is required 	<ul style="list-style-type: none"> Plug-in card for the BKEX probe to measure the conductivity 	Plug-in card Analog Digital Interface equipped with: <ul style="list-style-type: none"> RS232 Interface 2 x 20mA current output
Inductive probe CTI 500		PC interface for inductive probe CTI 500		
				
Is used		for MultiControl	for MultiControl	
Order number		310132	310133	
Technical data		<ul style="list-style-type: none"> Inductive probe for the conductivity measurement For all measuring converters with 20 mA output Fully programmable in the range from 500 µS/cm - 2000 mS/cm; the PC interface (Item no. 310133) is required 	<ul style="list-style-type: none"> to program the inductive probe CTI 500 	



Controllers	Accessories measuring instruments		pH combination electrodes		ESA screw-in fittings		pH-probe for measuring probe		Conductive conductivity probes without temperature sensor							
											We also construct special versions of our probes for your specific application upon request. All probes are suitable for applications up to 6 bar / 87 psi.					
	Is used		for MultiControl, EcoControl pH to replace devices purchased prior to 05/2013.		for EMK 20 and EMK 50		for MultiControl, EcoControl pH			Material	Cell constants [1/cm]	Maximum medium temp. [°C]	Connection design	Measuring range [µS/cm]	Order no.	
	Order number		EMK 20 320301 EMK 50 320302		320310		310137		Normal probes:							
									SO 1		PVC-U	0,10	40	PVC union nut Rp 1¼	1-2000	310001
									SO 5		PVC-U	0,50	40	PVC union nut Rp 1¼	5-10000	310003
									SO 10		PVC-U	1,00	40	PVC union nut Rp 1¼	10-20000	310014
	Technical data		• EMK 20: measuring range 1–12 pH temperature 0–80°C 32-176°F pressure 10 bar 145 psi • EMK 50 with PT 100: measuring range 0–14 pH temperature 0–135°C 32-275°F pressure 16 bar 232 psi		• stainless steel • max. medium temperature: 130°C / 266°F • connection: R ¾ external thread		• with PT 100 • measuring range 1–14 pH • temperature – 5 ...135°C (23 ... 275°F) • pressure 10 bar 145 psi		Screw-in probes:							
									SOE 0		V4A steel	0,01	130	external thread R ¾	0,1-200	310005
									SOE 1		V4A steel	0,10	130	external thread R ¾	1-2000	310002
									SOE 5		V4A steel	0,50	130	external thread R ¾	5-10000	310004
									Submersible probes:							
									SEI 5		PVC-U	0,50	40	DN 20, connection cable 5 m	5-10000	310103

Cable for combination electrode		Conductivity probe connection cables		pH probe connection cables		Conductive conductivity probes with temperature sensor									
										We also construct special versions of our probes for your specific application upon request. All probes are suitable for applications up to 6 bar / 87 psi.					
Is used		High-impedance coaxial cable, pre-made with screw and BNC connectors		Probe cable with STE5 cable socket		Probe cable with pH VarioPIN cable socket			Material	Cell constants [1/cm]	Maximum medium temp. [°C]	Connection design	Measuring range [µS/cm]	Order no.	
Order number		KOAX 5 320320 KOAX 10 320321 KOAX/PT 5 320325 KOAX/PT 10 320326		310136		310138		Normal probes:							
								ST 1 / PT 100		PVC-U	0,10	40	PVC union nut Rp 1¼	1-2000	310120
								ST 5 / PT 100		PVC-U	0,50	40	PVC union nut Rp 1¼	5-10000	310121
								Screw-in probes:							
Technical data		• KOAX 5: for EMF 20/RMK 20, length 5 m / 16.4 ft • KOAX 10: for EMK 20/RMK 20, length 10 m / 32.8 ft • KOAX/ PT 5: for EMF 50 with potential matching line, length 5 m / 16.4 ft • KOAX/ PT 10: for EMF 50 with potential matching line, length 10 m / 32.8 ft		• length 10 m / 32.8 ft • 4-lead for probes with PT 100 • with STE5 plug for conductivity probes		• length 10 m / 32.8 ft • 4-lead for probes with PT 100 • with VarioPin plug for pH probes		STE 0 / PT 100		V4A steel	0,01	130	external thread R ¾	0,1-200	310110
								STE 1 / PT 100		V4A steel	0,10	130	external thread R ¾	1-2000	310125
								STE 5 / PT 100		V4A steel	0,50	130	external thread R ¾	5-10000	310126
								STE 5 / PT 100 for measuring probe		V4A steel	0,50	130	Vario Pin	5-10000	310135
								Submersible probes:							
								SEI 5 / PT 100		PVC-U	0,50	40	DN 20, connection cable 5 m	5-10000	310131

Controllers	Accessories Softmaster®																														
	Adapter plate		RS232 interface		Current interface		PVP / PVH																								
																															
	Is used		for Softmaster® devices		for Softmaster® 2 devices		for Softmaster® 2 devices		Description		Pilot distributor with 4 switch settings • PVH / PVH 4: toggle switch for 8 bar (116 PSI) hydraulic pressure or 4.5 bar (65.3 PSI) pneumatic pressure • PVP / PVP 4: toggle switch for 8 bar (116 PSI) pneumatic pressure • PVH I / PVH I4: pulse switch for 8 bar (116 PSI) hydraulic pressure or 4.5 bar (65.3 PSI) pneumatic pressure • PVP I / PVP I4: pulse switch for 8 bar (116 PSI) pneumatic pressure • without screw connections																				
	Order number		130011		037259		037309		Description		control of individual valves in automatic water treatment systems																				
	Description		With the help of the adapter plate, you can easily replace your old Heyl controller with a Softmaster® controller without drilling		plug-in card for one RS232 interface and one current interface		plug-in card for one current interface		Mains connection		230–240 V, 24 V +/-10% 50–60 Hz																				
	Technical data		• The old holes can be used for mounting the adapter plate. The Softmaster® device is then attached to the adapter plate. • dimensions (W x H x D): 264 x 280 x 8 mm 10.4" x 11" x 0.3"		• current output: 0–20mA • RS232 serial interface		• current output: 0–20mA or 4–20mA • maximum load: 500 Ohm • galvanic isolation		Protection type/class		IP44 / I																				
									Power consumption		max. 5 VA																				
									Dimensions		approx. 125 x 120 x 210 mm 4.9" x 4.7" x 8.3" (W x H x D)																				
									Weight		approx 1.6 kg / 3.5 lbs																				
									Ambient temperature		0–45 °C / 32–113 °F																				
										Typ		24V valves, opened when depressu- rized				24V valves, closed when depressu- rized				230V valves, opened when depressu- rized				230V valves, closed when depressu- rized							
												PVH / PVH 4				250002				250004				250001				250003			
												PVP / PVP 4				250011				250013				250010				250012			
												PVH I / PVH I4				250006				250008				250005				250007			
												PVP I / PVP I4				250015				250017				250014				250016			

Analysis systems	Analysis kits		DIST 3 conductivity tester	DIST 4 conductivity tester	pHep+ pH tester	Limit value kits		DUROGNOST® I	DUROGNOST® SR 0	DUROGNOST® SR
										
	Is used als		electronic conductivity device for determining conductivity	electronic conductivity device for determining conductivity	electronic pH measuring device for determining pH value	Is used als		quick colorimetric determination of residual hardness	limit value test for quick determination of residual hardness	limit value test for quick determination of residual hardness
	Order number		330050	330060	330070	Order number		400050	400056	400055
	Description		<ul style="list-style-type: none">measuring range of 0,00–2000 µS/cmresolution of 1 µS/cmautomatic temperature compensationautomatic 1-point calibrationAutomatic shutdown after 8 or 60 minutes of non-use	<ul style="list-style-type: none">measuring range of 0,00–20,00 mS/cmresolution of 0,01 mS/cmautomatic temperature compensationautomatic 1-point calibrationAutomatic shutdown after 8 or 60 minutes of non-use	<ul style="list-style-type: none">measuring range of 0,00–14,00resolution of 0,01 pHAutomatic one-point or two-point calibrationautomatic temperature compensation	Description		special indicator in powder form for quick colorimetric determination of minimum hardness traces in the range of 0–0.1°dH or 0–2 ppm CaCO ₃ or 0,2 °f (French hardness) complete with measuring tube and spoon analyses: approx. 700 measuring time: approx. ½ minute	special liquid indicator in a dropper bottle for monitoring the residual hardness of softened water, adapted for limit values of 0.1 and 0.05 °dH. complete with measuring tube and stopper analyses: approx. 250 measuring time: approx. ½ minute	equipped like DUROGNOST® SR 0, but adapted for limit values of 0.5 and 0.25 °dH analyses: approx. 250 measuring time: approx. ½ minute
Dimensions		40 x 160 x 17 mm 1.6“ x 6.3“ x 0.7“ (W x H x D)	40 x 160 x 17 mm 1.6“ x 6.3“ x 0.7“ (W x H x D)	40 x 160 x 17 mm 1.6“ x 6.3“ x 0.7“ (W x H x D)						

Buffer solution for analysis kits				DUROGNOST® SR 1			DUROGNOST® special buffer solution	
buffer solution pH	Product description		Quantity	Order number				
	buffer solution pH 4,0		100 ml	425304				
	buffer solution pH 7,0		100 ml	425307				
	buffer solution pH 9,0		100 ml	425309				
	buffer solution pH 10,0		100 ml	425310				
conductivity solution	storage solution for pH tester		230 ml	425370		Is used als	limit value test for quick determination of residual hardness	buffer solution for alkaline water samples
	conductivity solution 1413 µS/cm		230 ml	425404				
		conductivity solution 12,88 mS/cm		425409		Order number	400054	400016
						Description	equipped like DUROGNOST® SR0, but adapted to limit values of 1 and 0.5 °dH analyses: approx. 250 measuring time: approx. ½ minute	for buffering strongly alkaline water samples (pH over 10) for determining total and residual hardness with DUROGNOST® and DUROVAL® kits (8 ml dropper bottle) analyses: approx. 200

















A company logo on the supplement is free with purchase of more than 100 Duroval® or Durognost® articles.





Other combinations of analysis cases and cabinets are possible upon request.








We handle the development, production, bottling and shipment of our reagents and analysis kits in house.






Analysis systems	Titration quick test kits											
	DUROVAL® 1 drop = 1 °dH			DUROVAL® 1 drop = 1 °f			DUROVAL® 1 Tr. = 10 ppm CaCO ₃			DUROVAL® A		
	DUROVAL® A with pipette 0-60°f			DUROVAL AF								
	Is used as			Is used as			Is used as			Is used as		
	Order number			Order number			Order number			Order number		
	Description			Description			Description			Description		
Analysis systems	DUROVAL® 1 drop = 1 °KH			DUROVAL® 1 drop = 0,1 °dH			DUROVAL® AP			DUROVAL® B		
	DUROVAL® BP			DUROVAL® BF								
	Is used as			Is used as			Is used as			Is used as		
	Order number			Order number			Order number			Order number		
	Description			Description			Description			Description		

Analysis systems	Titration quick test kits		Water hardness DUO		DUROVAL® C		DUROVAL® CPM		DUROVAL® K _{B 8,2}		DUROVAL® Sulfate		DUROVAL® TF		Analysis systems		
																	
	Is used as		titration kit for determining water hardness		titration kit for determining carbonate hardness/m-value		kit for determining the carbonate hardness (m-value) and p-value		Is used as		titration kit for determining base capacity up to pH 8.2		kit for determining the sulfate content of water			industrial kit for water treatment plants	
	Order number		400005		400060		400065		Order number		400077		400080			400042	
	Description		determining the hardness of raw water (0–30 °dH) and water after treatment (0–2 °dH) measuring range: 0 –30 °dH resolution: 0,5 °dH measuring range: 0–2 °dH resolution: 0,025 °dH complete with all reagents and accessories		acid capacity up to pH 4,3; K _{S4,3} analyses: approx. 200 (with an average carbonate hardness of 10 °dH) measuring time: approx. 2 minutes measurement accuracy: 0.5 °dH/0.25 mmol/l complete with measuring tube, dosing pipette with calibration 0–20 °dH and 0–7 mmol/l, special connection stopper, indicator, and 50 ml titration solution		equipped like Duroval® C above, but with an additional p-value indicator m-value: acid capacity up to pH 4,3; K _{S4,3} p-value: acid capacity up to pH 8,2; K _{S8,2} measuring time: approx. 2 minutes measurement accuracy: 0.5 °dH/0.25 mmol/l		Description		base capacity up to pH 8,2; K _{B8,2} analyses: approx. 100 (with an average base capacity of 1 mmol/l) measuring time: approx. 2 minutes resolution : 0.05 mmol/l complete with measuring tube, dosing pipette with calibration 0–2 mmol/l, special connection stopper, indicator, and 50 ml titration solution		complete with all reagents and accessories analyses: approx 30 titration pipette: calibrated 0–300 mg/l SO ₄ ²⁻ measurement accuracy: 10 mg/l SO ₄ ²⁻			• measuring tube • powder indicator • dosing pipette calibrated 0–60 °f (French hardness) • 30 ml titration solution analyses: approx. 60 (with an average carbonate hardness of 26.7 °f)	
	DUROVAL® Chlorid		DUROVAL® CO2		DUROVAL® K _{S 4,3}		DUROVAL® TI		DUROVAL® TI with pipette 0-60 °f		DUROVAL® TP						
																	
	Is used as		kit for determining the chloride content of water		test kit for the determination of free carbon dioxide in water via drop titration		titration kit for determining acid capacity up to pH 4.3		Is used as		industrial kit for water treatment plants		industrial kit for water treatment plants			industrial kit for water treatment plants	
	Order number		400090		400070		400067		Order number		400040		400038			400041	
	Description		complete with all reagents and accessories analyses: approx 200 measuring time: approx. 2 minutes titration pipette: calibrated 0–300 mg/l Cl ⁻ measurement accuracy: 10 mg/l Cl ⁻		complete with measuring tube, stopper. and three reagents analyses: approx. 200 (with an average concentration of 100 mg/l CO ₂)		Acid capacity up to pH 4,3; K _{S4,3} analyses: approx. 100 (with an average acid capacity of 1 mmol/l) measuring time: approx. 2 minutes resolution : 0.05 mmol/l complete with measuring tube, dosing pipette with calibration 0–2 mmol/l, special connection stopper, indicator, and 50 ml titration solution		Description		• measuring tube • liquid indicator • dosing pipette calibrated 0–30 °dH • 30 ml titration solution analyses: approx. 60 (with an average carbonate hardness of 15 °dH)		• measuring tube • liquid indicator • dosing pipette calibrated 0–60 °f (French hardness) • 30 ml titration solution analyses: approx. 60 (with an average carbonate hardness of 26.7 °f)			• measuring tube • powder indicator • dosing pipette calibrated 0–30 °dH • 30 ml titration solution analyses: approx. 60 (with an average carbonate hardness of 15 °dH)	

Analysis systems	Titration quick test kits		KSS titration kit		Polyamine test kit		DUROVAL®refill pack										Analysis systems																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									

Analysis systems	Colorimetric test kits	Testoval® ammonium	Testoval® aluminum	Testoval® chlorine DPD method 0,1-1 mg/l		Testoval® iron (II) + (III) dissolved, 0-1 mg/l	Testoval® iron (II) + (III) dissolved, 0-10 mg/l	Testoval® hydrazine	Analysis systems
									
	Is used as	color comparison kit for the concentration range 0–10 mg/l NH ₄ ⁺	color comparison kit for the concentration range 0–2 mg/l Al	color comparison kit for concentration range 0.1–1 mg/l of free and total chlorine	Is used as	color comparison kit for concentration range 0–1 mg/l of Fe	color comparison kit for concentration range 0–10 mg/l of Fe	color comparison kit for concentration range 0–1 mg/l N ₂ H ₄	
	Order number	410680	410650	410520	Order number	410547	410544	410556	
	Description	individual values: 0.1–0.5–1–2.5–5–10 mg/l, complete with 3 reagents analyses: approx. 70 measuring time: approx. 4 minutes	individual values: 0–0,1–0,2–0,5–1–2 mg/l, by diluting the water sample 1:10 the measuring range can be extended to 10-times concentrations; complete with 2 reagents analyses: approx. 130 measuring time: approx. 6 minutes	individual values: 0,1–0,2–0,3–0,5–0,75–1 mg/l, complete with 3 reagents analyses: approx. 70 measuring time: approx. 1 minute	Description	individual values: 0,05–0,1–0,25–0,5–0,75–1 mg/l, by diluting the water sample 1:10 the measuring range can be extended to 10-times concentrations; complete with 2 reagents analyses: approx. 100 measuring time: approx. 7 minutes	individual values: 0,25–0,5–1–2,5–5–10 mg/l, complete with 3 reagents analyses: approx. 60 measuring time: approx. 7 minutes	individual values: 0–0,05–0,1–0,25–0,5–1 mg/l, complete with reagent analyses: approx. 100 measuring time: approx. 2 minutes	
		Testoval® chlorine DPD method 0,5-4 mg/l	Testoval® chloride	Testoval® chromate CrVI		Testoval® copper	Testoval® manganese 0-0,5 mg/l	Testoval® manganese 0-20 mg/l	
									
Is used as	color comparison kit for concentration range 0.5–4 mg/l of free and total chlorine	color comparison kit for concentration range 0–100 mg/l Cl ⁻	color comparison kit for concentration range 0–5 mg/l Cr	Is used as	color comparison kit for the concentration range 0–2 mg/l Cu	color comparison kit for the concentration range 0–0,5 mg/l Mn	color comparison kit for the concentration range 0–20 mg/l Mn		
Order number	411520	410526	410532	Order number	410562	410660	410568		
Description	individual values: 0,5–1–1,5–2–3–4 mg/l, complete with 3 reagents analyses: approx. 70 measuring time: approx. 1 minute	individual values: 1–5–10–25–50–100 mg/l, complete with 2 reagents analyses: approx. 40 measuring time: approx. 3 minutes	individual values: 0,1–0,25–0,5–1–2,5–5 mg/l, complete with 2 reagents analyses: approx. 180 measuring time: approx. 3 minutes	Description	individual values: 0,1–0,25–0,5–1,0–1,5–2 mg/l, complete with reagent analyses: approx. 100 measuring time: approx. 2 minutes	individual values: 0,05–0,1–0,2–0,3–0,4–0,5 mg/l, complete with 3 reagents analyses: approx. 70 measuring time: approx. 17 minutes	individual values: 0,5–1–2,5–5–10–20 mg/l, complete with 2 reagents analyses: approx. 100 measuring time: approx. 1 minute		

Analysis systems	Colorimetric test kits							Analysis systems			
	Testoval® nitrite		Testoval® Phosphate® (orthophosphate)		Testoval® pH chlorine DPD		Testoval® sulfite				
											
	Is used as		color comparison kit for the concentration range 0–1 mg/l NO ₂ ⁻		monitoring pH value and chlorine content in swimming pools		Is used as		color comparison kit for the concentration range 0–20 mg/l SO ₃ ²⁻		
	Order number		410690		410601		Order number		410634		
	Description		individual values: 0,05–0,1–0,2–0,3–0,5–1 mg/l, by diluting the water sample 1:10 the measuring range can be extended to 10-times concentrations; complete with reagent. analyses: approx. 100 measuring time: approx. 15 minutes		individual values: 0,25–0,5–1–2,5–5–10 mg/l, by diluting the water sample 1:10 the measuring range can be extended to 10-times concentrations; complete with 3 reagents. analyses: approx. 180 measuring time: approx. 5 minutes		individual values: pH 6,8–7, 4–8, Chlor 0,1–0,5–1 mg/l, complete with a set of reagents analyses: approx. 70 measuring time: approx. 3 minutes		individual values: 0,5–1–2,5–5–10–20 mg/l, complete with 2 reagents analyses: approx. 150 measuring time: approx. 3 minutes		
Testoval® pH value 5,5-8				Testoval® pH value 8-12		Testoval® dissolved silicate					
											
Is used as		color comparison kit for pH range 5,5–8		color comparison kit for pH range 8–12		color comparison kit for the concentration range 0–10 mg/l SiO ₂					
Order number		410610		410616		410622					
Description		individual values: 5,5–6–6,5–7–7,5–8, complete with reagent analyses: approx. 250 measuring time: approx. 1 minute		individual values: 8–8,5–9–10–11–12, complete with reagent analyses: approx. 250 measuring time: approx. 1 minute		individual values: 0.25–0.5–1.0–2.5–5–10 mg/l; by diluting the water sample 1:10 the measuring range can be extended to 10-times concentrations; complete with 4 reagents analyses: approx. 100 measuring time: approx. 19 minutes					

Analysis systems	Testoval® refill pack		Analysis kits		Standard analysis cabinet H	Standard analysis cabinet S	Analysis cabinet special version	
		Product	Order number					
	aluminum	1 set of reagents for approx. 130 analyses replacement color comparison device, complete	410651 410652	Is used	for water analysis	for water analysis	for water analysis	
	ammonium	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410681 410682					
	chlorine DPD method 0.1–1 mg/l	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410521 410522	Order number	410300	410305	410310	
	chlorine DPD method 0,5-4 mg/l	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410521 410523					
	chloride	1 set of reagents for approx. 40 analyses replacement color comparison device, complete	410527 410528	Description	<ul style="list-style-type: none">• titration kits: 1 Duroval® A, 1 Duroval® B, 1 Duroval® CPM• Testoval® color comparison kits: 1 hydrazine, 1 phosphate, 1 pH value 8–12• 1 aerometer, 1 100 ml measuring cylinder, 1 500 ml sampling container, 1 100 ml measuring cup, 1 funnel, 50 folding filters	<ul style="list-style-type: none">• titration kits: 1 Duroval® A, 1 Duroval® B, 1 Duroval® CPM• Testoval® color comparison kits: 1 sulfite, 1 Phosphatest, 1 pH value 8–12• 1 aerometer, 1 100 ml measuring cylinder, 1 500 ml sampling container, 1 100 ml measuring cup, 1 funnel, 50 folding filters	Custom versions available upon request! example: <ul style="list-style-type: none">• titration kits: 1 Duroval® A, 1 Duroval® B, 1 Duroval® CPM• Testoval® color comparison kits: 1 sulfite, 1 Phosphatest• 1 Durognost® special buffer solution• 1 DIST 4 conductivity tester• 1 pHep+ pH tester• 1 100 ml measuring cylinder, 1 500 ml sampling container, 1 100 ml measuring cup, 1 funnel, 50 folding filters	
	chromate CrVI	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410533 410534					
	dissolved iron (II) + (III) 0-1 mg/l	1 set of reagents for approx. 100 analyses replacement color comparison device, complete	410548 410549					
	dissolved iron (II) + (III) 0-10 mg/l	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410545 410546					
	hydrazine	1 set of reagents for approx. 100 analyses replacement color comparison device, complete	410557 410558					
	copper	1 set of reagents for approx. 100 analyses replacement color comparison device, complete	410563 410564					
	manganese 0-0,5 mg/l	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410661 410662					
	manganese 0-20 mg/l	1 set of reagents for approx. 100 analyses replacement color comparison device, complete	410569 410570					
	nitrite	1 set of reagents for approx. 100 analyses replacement color comparison device, complete	410691 410692					
	Phosphatest®	1 set of reagents for approx. 180 analyses replacement color comparison device, complete	410593 410594					
	pH-chlorine DPD	1 set of reagents for approx. 70 analyses replacement color comparison device, complete	410602 410603					
	pH value 5,5-8	1 set of reagents for approx. 250 analyses replacement color comparison device, complete	410611 410612					
	pH value 8-12	1 set of reagents for approx. 250 analyses replacement color comparison device, complete	410617 410618					
	dissolved silicate	1 set of reagents for approx. 100 analyses replacement color comparison device, complete	410623 410624					
	sulfite	1 set of reagents for approx. 150 analyses replacement color comparison device, complete	410635 410636					
	cuvettes	replacement cuvette for color comparison devices replacement cuvette for chloride color comparison device	410001 410529					
					Boiler house analysis case		Analysis case special version	
					Is used			
					Order number	410320	410360	
				Description	<ul style="list-style-type: none">• titration kits: 1 Duroval® A, 1 Duroval® B, 1 Duroval® CPM• Testoval® color comparison kits: 1 sulfite, 1 Phosphatest• 1 pHep + pH tester, 1 pH 7,01 buffer solution in pouch, 1 pH 10,01 buffer solution in pouch• 1 DiST 4 conductivity tester, 1 5000 µS/cm conductivity solution	Custom versions available upon request! example: <ul style="list-style-type: none">• titration kits: 1 Duroval® A, 1 Duroval® B, 1 Duroval® CPM• Testoval® color comparison kits: 1 sulfite, 1 Phosphatest		

Analysis systems



Is used als special resin for protection against microbial contamination in softening plants in idle state

Order number	1 l Bioresin® BW 05	500002
	10 l Bioresin® BW 05	500001
	100 l Bioresin® BW 05	500006

Description

The disinfection effect of Bioresin® BW 05 is based on metallic silver, which has been firmly attached to the exchanger resin balls in a special procedure. Metallic silver is practically non-water-soluble. The smell and taste of the water are not affected.

- effective against microbial recontamination of the resin at low flow rate and in idle state
- does not negatively impact the disinfecting effect through backflushing and salting during filter regeneration, thus effective for a long time
- existing systems can be retrofitted for use
- no need for expensive dosing equipment to disinfect the filter material
- no premature regeneration of the softening system with sodium chloride necessary for disinfection, thus environmentally friendly and economical
- maintenance-free

Accessories
Chemie

Product	Order number
measuring tube 1+ 5 + 10 ml	051010
connecting plug, white	051013
pipette, 0-60 polyamine	051101
pipette, 0-4,0 °f	051106
pipette, 0-30 Duroval chloride and sulphate	051109
pipette, 0-30 °dH	051110
pipette, 0-2 °dH	051112
pipette, 0-20 °dH 0-7 mmol/l	051114
pipette, 0-60 °f	051116
replacement cuvette, normal	410001
analysis cabinet, empty	410301
aerometer	410302
folding filters (pack of 50)	410303
100 ml measuring cylinder	410304
500 ml sampling container	410306
funnel	410307
100 ml measuring cup	410308



All our newly developed devices undergo thorough testing in the climatic chamber and test space. Upon customers request, we can also produce OEM devices featuring individual front foils.

Water is our element

Our environmental policy specifies the principles of conduct for environmental protection that we follow at Gebr. Heyl Analysentechnik GmbH & Co. KG. It is determined by the management and generally applicable.

As a commercial enterprise, we are part of a society and also part of the environment and the ecosystem. Consciousness of our responsibility to society, the environment, and the ecosystem is necessary for our children to be able to experience a happy, prosperous future.

As a commercial enterprise, we accept our special responsibility to preserve our natural world. We're convinced that it is necessary to ensure that the free resources of water, air, and earth, as well as flora and fauna, be handled sparingly.



Contract Development



We develop innovative, customized designs ourselves. But that's not all: We provide an appropriate housing design, prepare technical documentation, and obtain the necessary sales permissions and certificates. And if you would like, we also handle series production.

You choose between our two options:



1. From a „flash of inspiration“ to the prototype – we develop the product you want according to your specifications

- We plan your product together and look for the best solution for you
- We develop the product according to your specifications
- We create prototypes
- We organize certificates (CE-marking, TÜV inspection, etc.)



2. Whether Softmaster®, MultiControl®, or Testomat 2000® – we're happy to adapt our designs to your needs!

- We select the basic instrument corresponding to your needs together with you
- We design additional modules corresponding to your needs
- We develop software according to your specifications
- We create prototypes
- We organize certificates (CE-marking, TÜV inspection, etc.)

Brief overview of our contract development services

- Hardware and software development (analysis instruments, control and measuring devices, dosing pumps)
- Indicator and reagent development (e.g. water analysis)
- Test kit development
- Mechanics construction
- Material logistics
- Layout design
- Prototype fabrication
- Model series production
- Preparing operating instructions, instruction manuals, and safety data sheets
- Organizing desired or required certificates (e.g., CE-marking, TÜV inspection, etc.)

- Product maintenance
- Training



Development of new indicators in our chemical laboratory



Contract Manufacturing



We implement your idea! We produce your product!

High quality, quick delivery times, customer orientation, and cooperative partnership are the foundations of our company, which operates in many countries. These maxims result in the continuous enhancement of our products and services and the continuous skill enhancement of our employees.



We attach great value to the reliability and durability of our products and have adapted the supply of spare parts to the long service lives of our instruments. In addition, we attach great value to multi-level 100% testing, only possible on the basis of small batch production. We test all assemblies separately before they are installed in our instruments and then subjected to a multi-day quality check in the instrument. Last but not least, we



develop and produce our own products in order to satisfy our own extremely high quality demands. Our mission includes consistently catering to our customers' needs and developing the best solution together with them!

Brief overview of our contract manufacturing services

- We produce your product – in small batches too!
- Producing chemical formulations
- Filling into containers of any size
- Packaging
- Circuit board assembly
- Soldering
- Assembly
- Testing

- We implement your idea! You receive a final product from a single source:
- We optimize your product together and look for the best solution for you
- We look for the lowest-priced supplier
- We take care of purchasing all individual parts needed

- We coordinate cooperation with your partners
- We manufacture your product
- We subject the final product to extensive final checks
- We ship your finished product to the desired address in your name



All our newly developed devices undergo thorough testing in the climatic chamber and test space. Upon customers request, we can also produce OEM devices featuring individual front foils.



Terms and Conditions of Gebrüder Heyl Analysentechnik GmbH & Co. KG

§ 1 Validity of the conditions

Our deliveries and services shall occur exclusively under these terms and conditions. At the same time, they are valid for all future business relations, even if they are not agreed expressly again. Customer's terms and conditions differing from them are not valid.

§ 2 Conclusion of a contract

(1) Our offers are non-binding. Technical changes as well as changes in shape, color, and/or weight within the scope of what is reasonable are reserved.

(2) Orders placed with us are binding offers which we can choose to accept within two weeks. Acceptance is declared either in writing or by delivery of goods to our customers.

(3) If customers place an order electronically, we shall immediately confirm receipt of the order. Receipt confirmation does not constitute a binding acceptance of the order, but can be combined with the declaration of acceptance. We shall store the contractual text and send it to the customer via e-mail together with these terms and conditions if requested.

(4) Conclusion of a contract occurs under reserve of the correct and timely delivery through our supplier, unless we are liable in the case of non-delivery, e.g. if a congruent hedging transaction has not been agreed with our supplier. We shall immediately inform the customer of any possible unavailability of the service and refund any service in return already received.

§ 3 Prices

(1) Our quotation prices are valid for 30 days after the quotation date, unless otherwise stated. In case of doubt, the prices specified in our confirmation of order are decisive.

(2) Our prices are valid, unless otherwise agreed, as net prices without cash discounts or any other allowances ex stock in Hildesheim, Germany, excluding packaging and shipping costs and plus the respective statutory VAT.

(3) If there is any change in labor costs, material costs, purchase conditions, etc. between the date of contract conclusion and the agreed and/or actual delivery date, we shall be entitled to adjust our prices accordingly and, if an agreement cannot be reached, to withdraw from the contract. This only applies for non-trade operators if the time between the date of contract conclusion and the delivery is more than four months.

(4) Our invoices are payable within 30 days of the delivery date with no deductions. In the event of default on payment, we are entitled, irrespective of the proof of greater damage caused by delay, to charge a higher default penalty interest at 8% points above the respective base rate.

(5) The off-setting of any counter-claims by the purchaser is permissible only if such counterclaims are undisputed or established in law. Purchasers can only exercise their right of retention if it is based on claims contained in this contract.

§ 4 Delivery

(1) Delivery and service delays due to instances of force majeure or circumstances which make delivery difficult or impossible – e.g. strike, lock-out, administrative regulations, natural disasters, business disruptions, power failure, etc. irrespective of whether we or our suppliers are affected by such circumstances – will exempt us from our contractual deadlines and obligations. We then have the right to postpone the delivery or the service for the period of the hindrance. If the delivery or service becomes impossible or unreasonable and this is not due to our fault, we shall be entitled to terminate the contract. In this case the customer has no right to make claims for damages.

(2) We shall be entitled to carry out partial deliveries and partial services.

§ 5 Transfer of risk

(1) The risk of accidental loss and accidental deterioration of the goods passes to the customer as soon as the consignment has been transferred to the freight carrier in the case of mail order purchase or other parties designated by the customer to carry out delivery. This applies irrespective of which party bears the transport costs.

(2) Goods will still be delivered even if the customer is delayed in accepting the delivery.

(3) We shall only take out transport insurance at the customer's request and expense.

§ 6 Warranty against defect

(1) We provide warranty for two years at our own discretion via fault rectification or replacement delivery. If the fault cannot be eliminated within an acceptable time period or if rectification or replacement delivery is to be considered as failed due to other reasons, customers can, according to their choice, demand a reduction or terminate the contract. Failure can only be assumed if sufficient opportunity has been provided to us to rectify the fault or to deliver a replacement without the desired aim being achieved, if fault rectification or replacement delivery is impossible, if we refuse to rectify the fault of deliver a replacement or unacceptably delay fault rectification or replacement delivery, if there is justified doubt regarding the prospect of success, or if they are considered unacceptable due to other reasons. Cancellation is impermissible on the grounds of minor faults. Wear parts (e.g. seals, moving parts, etc.) are only guaranteed for one year. For such parts, deterioration due to proper use does not constitute a fault. We assume no liability for faults that arise due to improper use, nor for faults arising because the original HEYL Testomat® indicator is not used exclusively.

(2) For a commercial transaction our customer must check that the goods conform to the contract immediately upon their receipt, immediately notify us in writing of any visible damages upon receipt of the goods, and notify us of any other defects immediately after their identification (§ 377 HGB); otherwise the goods are considered as accepted. Other business requires written notification of visible damage within two weeks upon receipt of the goods. The burden of proof of the fault, the time of its identification, and the timely receipt of the complaint rests with the customer.

(3) Contrary to the aforesaid rules of warranty, we only sell used items, except in the case of fraudulent intent, with the exclusion of any form of warranty. This does not affect warranty commitments.

(4) If customers decide to terminate the contract due to a fault after an unsuccessful rectification of faults, they are not entitled to an additional claim for damages due to this fault; the customer is obliged to return the goods. If customers make a claim for damages after an unsuccessful rectification of faults, the goods remain with the customers if this is reasonable for them. The claim for damages is then limited to the difference between the purchase price and the value of the faulty item. This is not valid if we have fraudulently attempted to violate the contract.

§ 7 Liability

(1) Our liability and the liability of our vicarious agents are hereby excluded for slight negligent breach of duty, provided that no contractual duties, damages to life, limb, or health, or agreed guarantees or claims in accordance with the German Product Liability Act are affected. In the case of violation of contractual duties our liability shall be limited to typical contractual losses which could have been reasonably foreseen.

(2) The period of limitation of one year applies for claims for damages against us which are not based on willful conduct attributable to us. This does not include suppliers' claims for recourse in accordance with section 478 of the BGB.

§ 8 Retention of title

(1) We retain the title to the goods until complete settlement of all claims against the customer that we are entitled to now or in the future.

(2) Our customers shall be entitled to process and resell the conditional goods in the ordinary course of business, provided that they are not in default. The pledging of goods or security transfers of ownership is not permissible. Claims resulting with respect to the conditional goods (including all balance claims from the current account) resulting from the resale or any other cause in law (insurance, unlawful act) shall now be assigned by the customer to us as security up to the amount of our claim. We hereby accept the transfer and authorize the customers to collect the claims assigned to us for their account in their own name. This authorization can only be revoked if our customers do not fulfill their payment obligations.

(3) Any adaptation and processing of the conditional goods by the customers shall always be carried out in our name and on our behalf. If processing occurs with goods which do not belong to us, we shall acquire co-ownership of the new goods in proportion to the value of the goods supplied by us to other processed goods. The same shall apply if the conditional goods are intermingled with other goods which do not belong to us.

(4) The customers shall keep our retention of title free of charge. They are obliged to take out insurance in a reasonable and usual scope. In the case of an intervention or seizure of the conditional goods by a third party – in particular by a marshal – our customers are obliged to indicate our ownership and to notify us without delay.

§ 9 Installation and maintenance

(1) If our customer asks us to carry out installation and maintenance work, which we do not carry out within the framework of our liability for defects, a separate contract for work and services comes into being. If not stated otherwise hereinafter these terms and conditions also apply for this contract for work and services. Payment takes place according to the respective valid prices for maintenance rates.

(2) A written estimate is required if our customer desires a binding quote. We are bound to this estimate for one complete month after submission.

(3) Customer rights due to defects of installation and maintenance work expire one year from acceptance of the repair item of work. This time limit does not apply if we acted with intent or gross negligence or if we are responsible for damages to life, limb, or health or for claims in accordance with the German Product Liability Act. In the case of contractors, we do not accept liability even for slight negligent breach of marginal contractual obligations.

§ 10 Miscellaneous

(1) The exclusive place of jurisdiction for all disputes is Hildesheim, Germany, if our customer is a trader, a legal person governed by public law, or special public law funds. This shall also apply if our customers do not have a general place of jurisdiction in the Federal Republic of Germany or if their normal place or residence when legal action is brought is unknown.


(2) Changes or additions to this contract have to be in writing. This also applies to the written form clause.

(3) Our customers consent to storage of their personal data for the purpose of contract conclusion.

(4) In the event that a provision of this contract or these terms and conditions is or becomes invalid or unenforceable, this shall not affect the validity of the remaining provisions.

(5) Only the relevant laws of the Federal Republic of Germany shall apply; the UN Convention on the International Sale of Goods is hereby excluded, even if our customer's registered seat is abroad.

Companies of the Heyl Network

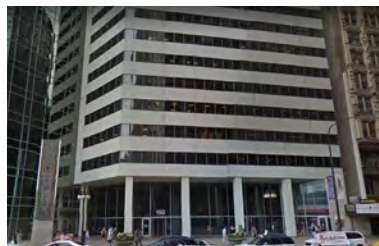**Headquarters:**

Gebrüder Heyl Analysentechnik GmbH & Co. KG

Orleansstr. 75 b

31135 Hildesheim

Germany

Phone: +49 (0) 51 21 28 93 3-0

Fax: +49 (0) 51 21 28 93 3-67

E-Mail: info@heyhl.de
www.heyhl.de

Germany sales:

Gebrüder Heyl Vertriebsgesellschaft
für innovative Wasseraufbereitung mbH

Max-Planck-Str. 16

31135 Hildesheim

Phone: +49 (0) 5121 76 09-0

Fax: +49 (0) 5121 76 09-44

E-Mail: vertrieb@heylineomeris.de
www.heylineomeris.de

France:

Heyl Analysis Technologies

Techniparc

9 Rue d'Alembert

91240 Saint Michel sur Orge

Phone: +33 (0) 1 69 46 17 17

Fax: +33 (0) 1 69 46 17 40

E-Mail: contact@heyhl-at.com
www.heyhl-at.com

Netherlands:

Pro Water B.V.

Postbus 960

7550 AZ Hengelo

Phone: +31 (0) 74 29 15 150

Fax: +31 (0) 74 29 15 350

E-mail: info@prowater.nl
www.prowater.nl

Switzerland:

BWT AQUA AG

Hauptstr. 192

4147 Aesch

Phone: +41 (0) 61 755 88 99

Fax: +41 (0) 61 755 88 90

E-Mail: info@bwt-aqua.ch
www.bwt-aqua.ch

USA:

Heyl Brothers North America L.P.

150 North Michigan Avenue, 35th Floor

Chicago, Illinois 60601

Phone: +1 312-377-6123

Fax: +1 312-644-0738

E-Mail: USA@heyhl.de
www.heylbros.com

