

INNOVATIONS

TESTOMAT® 808 SiO₂

- Measuring chamber flushed with pressure
- Low water consumption
- Cutting-edge electronics
- State-of-the-art indicator pump system
- Direct error and indicator quantity display
- Quality management with 2 relay outputs
- Limit value evaluation / External control
- Alarm processing
- Internal flushing via manual control
- 72 hours of unsupervised operation possible
- Selection between two indicator bottle sizes
- Two selector switches for interval measurement and limit value evaluation

AVAILABLE INDICATORS

Reagents	Art. no. 100 ml bottle	Art. no. 500 ml bottle
Testomat® 808 SiO ₂ reagent set, reagents A + B	140808	-
Testomat® 808 SiO ₂ reagent A	-	141808
Testomat® 808 SiO ₂ reagent B	-	141809

COMPANIES OF THE HEYL NETWORK:

Germany

Gebrüder Heyl Vertriebsgesellschaft
für innovative Wasseraufbereitung mbH

www.heylnemeris.de

Phone: +49 (0) 51 21 76 09 0

Fax: +49 (0) 51 21 76 09 44

Email: vertrieb@heylnemeris.de

France

Heyl Analysis Technologies

www.hey-at.com

Phone: +33 (0) 1 69 46 17 17

Fax: +33 (0) 1 69 46 17 40

Email: contact@hey-at.com

The Netherlands

Pro Water B.V.

www.prowater.nl

Phone: +31 (0) 74 2 91 51 50

Fax: +31 (0) 74 2 91 53 50

Email: info@prowater.nl

USA

Heyl Brothers North America L.P.

www.heylbros.de

Phone: +1 (0) 312 377 61 23

Fax: +1 (0) 312 644 07 38

Email: sales@heylbros.com

Switzerland

BWT AQUA AG

www.bwt-aqua.ch

Phone: +41 (0) 61 755 88 99

Fax: +41 (0) 61 755 88 90

Email: info@bwt-aqua.ch

Production and Development

Gebrüder Heyl Analysentechnik GmbH &
Co. KG

www.heyanalysis.de

Phone: +49 (0) 51 21 2 89 33 0

Fax: +49 (0) 51 21 2 89 33 67

Email: info@heyanalysis.de

Flyer Testomat 808Si EN 220228

TESTOMAT® 808 SiO₂

ONLINE ANALYSIS INSTRUMENT
FOR SILICA UP TO 1.2 PPM



GEBRÜDER HEYL

Analysentechnik GmbH & Co. KG

Water is our Element

PERFORMANCE SPECIFICATIONS

FOR THE TESTOMAT® 808 SiO₂

The Testomat® 808 SiO₂ equipment has been designed for use in the sterilisation of hospitals. The device is a limit gauge that automatically monitors the level of SiO₂ in the water. It complies with the EN 285:2006 standard for steam sterilizers.

The device is also suited in other industries for product monitoring due to its adjustable measuring range.

Overview of functions:


- Selection of 10 limit values from 0.3 to 1.2 ppm
- Automatic interval mode interval pause can be set from 0 – 480 minutes
- External control (quit alarms, stop analysis)
- Manual start
- Extended operating periods due to 500 ml indicator storage bottle
- RS232 interface for optional firmware update and data output to the computer
- Weekend operation monitoring through 72-hour operation without supervision (BOB)
- Status and error messages output via a current loop



Scan the code and visit us on our website!

PLANT EXAMPLE

SILICATE MONITORING IN HOSPITALS

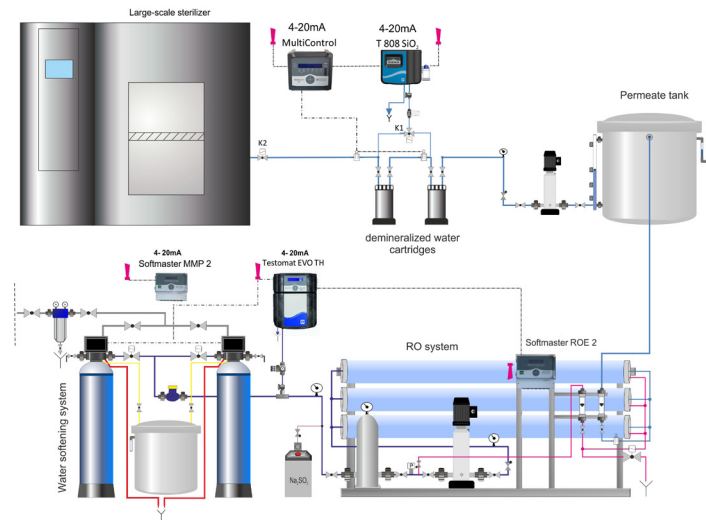

Surgical instruments can be destroyed by silicates > 1ppm in the sterilization steam. The silicate monitoring with the Testomat® 808 SiO₂ helps to eliminate this risk and in the long term to avoid the high costs of replacement of surgical instruments.



© Designed by Nensuria / Freepik

TECHNICAL DATA

FROM THE TESTOMAT® 808 SiO₂

Power supply: 24 / 115 / 230V, 50 – 60 Hz
Instrument protection 230 – 240 V: T0.1 A
Instrument protection: 115 V: T0.2 A
Instrument protection: 24 V: T0.8 A

Mains protection for consumers: max. 4 A (N, L)

Power consumption: max. 16 VA, without external load

Protection class: I

Degree of protection: IP 44

Conformity: EN 61000-6-2,
EN 61000-6-4, EN 61010-1
BS EN 61000-6-2, BS EN
61000-6-4+A1, BS EN 61010-1+A1

Ambient temperature: 15 – 25 °C

Measuring range: Silica 0.3 – 1.2 ppm

Current interface: Output of defined values (5, 8, 11, 14, 17, 20 mA) for displaying status and error messages, max. load 500 Ohms

Contact load relay: 230V / 4AAC ohm resistive load

Dimensions: W x H x D = 364 x 314 x 138 mm
with side pocket: 442 x 314 x 138 mm

Weight: 4350 g

Mains water supply

Operating pressure: Depending on product configuration: 0.3 to 1 bar; 1 to 4 bar (a pressure reducer (special accessory) should be used from 4 to 8 bar range)

Water temperature: 10 – 40°C

Water inlet/ outlet: Opaque hose with 6 mm external diameter / 4 mm internal diameter

